




2014 **M**ultilayer Ceramic Capacitors Product catalog

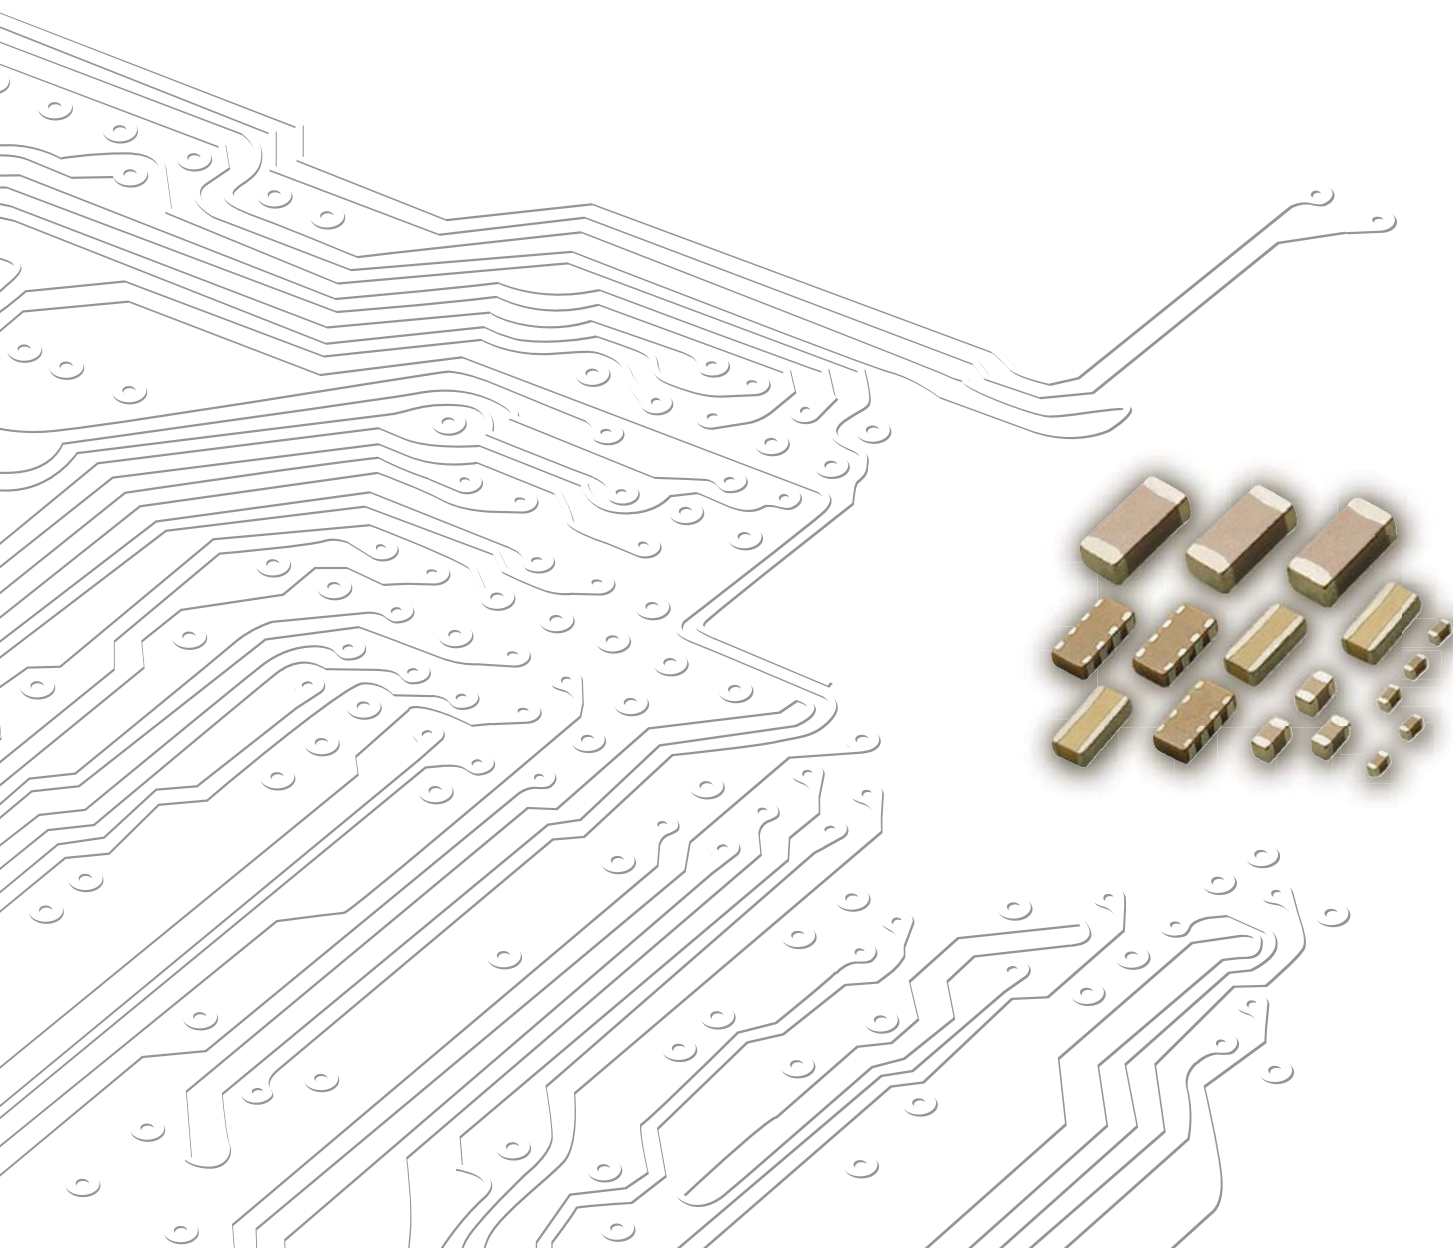


Product Portfolio



Multilayer Ceramic Capacitors (MLCC)




Chip-Resistor

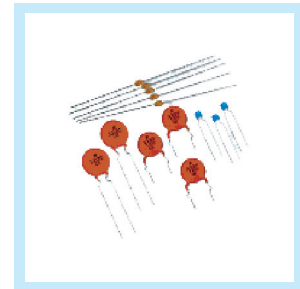

Disc Capacitors



RF Device and High Frequency Inductors



Varistors and SMD-Varistors

IEC-63 Nominal Resistance / Capacitance

E1	100																							
E3	100				220					470														
E6	100	150	220	330	470	680																		
E12	100	120	150	180	220	270	330	390	470	560	680	820												
E24	100	110	120	130	150	160	180	200	220	240	270	300	330	360	390	430	470	510	560	620	680	750	820	910
E96	100	102	121	124	147	150	178	182	215	221	261	267	316	324	383	392	464	475	562	576	681	698	825	845
	105	107	127	130	154	158	187	191	226	232	274	280	332	340	402	412	487	499	590	604	715	732	866	887
	110	113	133	137	162	165	196	200	237	243	287	294	348	357	422	432	511	523	619	634	750	768	909	931
	115	118	140	143	169	174	205	210	249	255	301	309	365	374	442	453	536	549	649	665	787	806	953	976

E6: $\sqrt[6]{10} \approx 1.46$ E12: $\sqrt[12]{10} \approx 1.21$

E1 series resistance: 1Ω, 10Ω, 100Ω, 1000Ω, 10000Ω, 100000Ω

INDEX

Subject	Page
Quick Product Information	1
How To Order and Packaging Dimension/Quantity	2
The Outlines and External Dimensions of Capacitors	3
General Purpose Caps (6.3V~100V)	4
Ultra-small Caps (01R5 series)	9
Middle & High Voltage Caps (200V~3kV)	10
High Q & Low ESR Caps (HH series)	13
Microwave Caps (RF series)	15
Soft Termination Capacitors (SH/SG series)	17
Open-mode Design Caps (OP series)	23
Capacitor Arrays (Y4C2/Y4C3 series)	25
Low Profile Caps (TT series)	26
Low Inductance Caps (0612 series)	27
Safety Certificated Caps X1/Y2 (S2 series)	28
Safety Certificated Caps X2/Y3 (S3 series)	29
Automotive Capacitor Qualified to AEC-Q200 (MT series)	30
Automotive Caps Without AEC-Q200 Certification (MG series)	31
Automotive Capacitor Arrays Qualified to AEC-Q200 (MY series)	34
Appendix : Reliability Test Conditions and Requirements	35
Appendix : General Information	38

*The specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

*This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

■ QUICK PRODUCT INFORMATION

Series	Dielectric	Size	Capacitance	Rated voltage	Page
General Purpose Caps (6.3V~100V)	NPO	0201, 0402, 0603, 0805, 1206, 1210, 1812	0.3pF~0.1μF	10V, 16V, 25V, 50V, 100V	5
	X7R	0201, 0402, 0603, 0805, 1206, 1210, 1812	100pF~47μF	6.3V, 10V, 16V, 25V, 50V, 100V	
	X6S	0402, 0603, 0805, 1206,1210	0.47μF~100μF	6.3V, 10V, 16V, 25V	
	X5R	0201, 0402, 0603, 0805, 1206,1210	0.027μF~100μF	6.3V, 10V, 16V, 25V,50V	
	Y5V	0402, 0603, 0805, 1206, 1210, 1812	0.01μF~100μF	6.3V, 10V, 16V, 25V, 50V, 100V	
Ultra-small Caps (01R5 series)	NPO	01005	0.2pF~100pF	16V	9
	X7R	01005	100pF~1000pF	10V	
	X5R	01005	1000pF~0.1μF	6.3V,10V	
Middle & High Voltage Caps (200V~3kV)	NPO	0603, 0805, 1206, 1210, 1808, 1812	0.5pF~6800pF	200V, 250V, 500V, 630V, 1kV, 2kV, 3kV	11
	X7R	0603, 0805, 1206, 1210, 1808, 1812	100pF~1μF	200V, 250V, 500V, 630V, 1kV, 2kV, 3kV	
	Y5V	0805, 1206, 1210,1812	0.01μF~0.68μF	200V, 250V	
High Q & Low ESR Caps (HH series)	NPO	0402, 0603,0805	0.1pF~3300pF	16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V	14
Microwave Caps (RF series)	NPO	0201, 0402,0603,0805	0.1pF~100pF	6.3V, 10V, 25V, 50V,100V,500V	16
Soft Termination Capacitors (SH/ SG series)	NPO	0402,0603,1206, 1210,1808	0.5pF~0.015μF	10V,16V,25V,50V,100V,200V,250V,500V, 630V,1KV,3KV	18
	X7R	0402,0603, 0805, 1206, 1210, 1808, 1812	100pF~10μF	10V,16V,25V,50V,100V,200V,250V,500V, 630V, 1kV,2kV, 3kV	
Open-mode Design Caps (OP series)	X7R	0805, 1206, 1210, 1812	100pF~1μF	100V, 200V, 250V, 500V	23
Capacitor Arrays (Y4C2/Y4C3 series)	NPO	0508 (4x0402), 0612 (4x0603)	10pF~470pF	25V, 50V,100V	25
	X7R	0508 (4x0402), 0612 (4x0603)	180pF~0.1μF	10V, 16V, 25V, 50V	
	Y5V	0612 (4x0603)	0.01μF~0.1μF	16V, 50V	
Low Profile Caps (TT series)	X7R	0805, 1206	0.22μF~4.7μF	10V, 16V, 25V, 50V	26
	X5R	0603, 0805, 1206, 1210	0.22μF~22μF	6.3V, 10V, 16V, 25V,50V	
	Y5V	0805, 1206, 1210	1μF~10μF	10V, 16V, 25V, 50V	
Low Inductance Caps (0612 series)	X7R	0612	0.01μF~0.15μF	50V	27
Safety Certificated Caps X1/Y2 (S2 series)	NPO	1808, 1812, 2211	4pF~680pF	250Vac	28
	X7R	1808, 1812,2220, 2211	100pF~4700pF	250Vac	
Safety Certificated Caps X2/Y3 (S3 series)	NPO	1808, 1812	3.9pF~1000pF	250Vac	29
	X7R	1808, 1812	150pF~5600pF	250Vac	
Automotive Capacitor Qualified to AEC-Q200 (MT series)	NPO	0402, 0603, 0805, 1206,1210	0.5pF~0.01μF	10V,16V,25V,50V,100V, 250V, 500V, 630V	30
	X7R	0402, 0603, 0805, 1206,	100pF~1μF	10V,16V,25V,50V,100V	
Automotive Caps Without AEC-Q200 Certification (MG series)	NPO	0402, 0603, 0805, 1206, 1210, 1812	0.5pF~0.033μF	10V,16V,25V,50V,100V,200V,250V	31
	X7R	0402, 0603, 0805, 1206, 1210, 1812	100pF~2.2μF	10V,16V,25V,50V,100V,200V,250V	
	X5R	0402, 0603, 0805, 1206, 1210	0.056μF~10μF	6.3V,10V,16V,25V	
Automotive Capacitor Arrays Qualified AEC-Q200 (MY Series)	NPO	0508 (4x0402)	10pF~220pF	50V	34
	X7R	0508 (4x0402)	1000pF~0.1μF	10V, 16V, 25V	

HOW TO ORDER

Type of MLCC	0805			B	104	K	500	C	T
General Purpose MLCC Middle & High Voltage MLCC Ultra-small MLCC	Size Inch (mm) : 01R5 (0402), 0201 (0603), 0603 (1608), 1206 (3216), 1808 (4520), 0402 (1005), 0805 (2012), 1210 (3225), 1812 (4532)			Dielectric N=NP0 B=X7R S=X6S X=X5R F=Y5V	Capacitance Two significant digits followed by no. of zeros. And R is in place of decimal point. R47=0.47pF 0R5=0.5pF 1R0=1pF 100=10pF 101=100pF 102=1000pF 103=0.01uF 104=0.1uF 105=1uF 106=10uF 107=100uF	Tolerance A= ±0.05pF B= ±0.1pF C= ±0.25pF D= ±0.5pF F= ±1% G= ±2% J= ±5% K= ±10% M= ±20% Z= -20/+80%	Rated voltage Two significant digits followed by no. of zeros. And R is in place of decimal point. 4R0=4 Vdc 6R3=6.3 Vdc 100=10 Vdc 160=16 Vdc 250=25 Vdc 500=50 Vdc 101=100 Vdc 201=200 Vdc 251=250 Vdc 501=500 Vdc 631=630 Vdc 102=1k Vdc 202=2k Vdc 302=3k Vdc 502=5k Vdc 602=6k Vdc	Termination L=Ag/Ni/Sn C=Cu/Ni/Sn L=Ag/Ni/Sn C=Cu/Ni/Sn P=Cu/Polymer Ni/Sn C=Cu/Polymer Ni/Sn C=Cu/Ni/Sn	Packaging B=Bulk C=Bulk cassette T=7" reeled Q=10" reeled G=13" reeled
Low Inductance MLCC	0612 (1632)								
High Q / Low ESR MLCC Microwave MLCC Low Profile MLCC Open Mode MLCC Safety Certificated MLCC Low Distortion MLCC Automotive MLCC	RF		03						
	Series HH=High Q/ Low ESR RF=Microwave TT=Low profile OP=Open-mode design S2=X1/Y2 safety class S3=X2/Y3 safety class LD= Low distortion MG=Automotive Cap. without AEC-Q200 MT=Automotive Cap. with AEC-Q200 MY=Automotive Array with AEC-Q200		Size Inch : 02=01005 03=0201 15=0402 11=0505 18=0603 21=0805 12=0508 31=1206 32=1210 42=1808 43=1812 52=2211 55=2220						
Soft Termination MLCC	SH=With Ag polymer SG=With Cu polymer								
Cap Arrays MLCC	Y	4 C	3						
	Type Y=Capacitor array	Cap. Nr. 4C=4xCap	Termination pitch 3=0.03 inch 2=0.02 inch						


* The packaging code per each size of reel, please refer to following table "packaging style and quantity".

PACKAGING STYLE AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
01005 (0402)	0.20±0.02	V	20,000	-	-	-
0201 (0603)	0.30±0.03	L	15,000	70,000	-	-
0402 (1005)	0.50±0.05	N	10,000	50,000	-	-
	0.50+0.02/-0.05	Q	10,000	50,000	-	-
	0.50±0.20	E	10,000	-	-	-
0603 (1608)	0.50±0.10	H	4,000	-	-	-
	0.80±0.07	S	4,000	15,000	-	-
	0.80+0.15/-0.10	X	4,000	15,000	-	-
0805 (2012)	0.50±0.10	H	4,000	15,000	-	-
	0.60±0.10	A	4,000	15,000	-	-
	0.80±0.10	B	4,000	15,000	-	-
	0.85±0.10	T	4,000	15,000	-	-
	1.25±0.10	D	-	-	3,000	10,000
1206 (3216)	0.80±0.10	B	4,000	15,000	-	-
	0.85±0.10	T	4,000	15,000	-	-
	0.95±0.10	C	-	-	3,000	10,000
	1.15±0.15	J	-	-	3,000	10,000
	1.25±0.10	D	-	-	3,000	10,000
	1.60±0.20	G	-	-	2,000	10,000
	1.60+0.30/-0.10	P	-	-	2,000	9,000
1210 (3225)	0.85±0.10	T	-	-	3,000	10,000
	0.95±0.10	C	-	-	3,000	10,000
	1.25±0.10	D	-	-	3,000	10,000
	1.60±0.20	G	-	-	2,000	-
	2.00±0.20	K	-	-	1,000	6,000
	2.50±0.30	M	-	-	1,000	6,000
1808 (4520)	1.25±0.10	D	-	-	2,000	10,000
	1.10±0.15	F	-	-	2,000	10,000
	1.60±0.20	G	-	-	2,000	8,000
1812 (4532)	2.00±0.20	K	-	-	1,000	6,000
	1.25±0.10	D	-	-	1,000	5,000
	1.60±0.20	G	-	-	1,000	-
	2.00±0.20	K	-	-	1,000	-
1812 (4532)	2.50±0.30	M	-	-	500	3,000
	2.80±0.30	U	-	-	500	-

The Outlines and External Dimensions of Capacitor

■ SINGLE CHIP CAPACITORS

Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	Soldering Method *	M _B (mm)	
	01R5 (0402)	0.40±0.02	0.20±0.02	0.20±0.02	V	0.10±0.03	
	0201 (0603)	0.6±0.03	0.3±0.03	0.3±0.03	L	R	0.15±0.05
		0.6±0.05 ^{#2}	0.3±0.05 ^{#2}	0.3±0.05 ^{#2}			0.15±0.1/-0.05
		0.6±0.09 ^{#3}	0.3±0.09 ^{#3}	0.3±0.09 ^{#3}			
	0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	N	R	0.25±0.05/-0.10
		1.00±0.20	0.50±0.20	0.50+0.02/-0.05	Q	R	
				0.50±0.20	E	R	
	0603 (1608)	1.60±0.10	0.80±0.10	0.80±0.07	S	R / W	0.40±0.15
		1.60+0.15/-0.10	0.80+0.15/-0.10	0.50±0.10	H	R / W	
				0.80+0.15/-0.10	X	R / W	
	0805 (2012)	2.00±0.15	1.25±0.10	0.50±0.10	H	R / W	0.50±0.20
				0.60±0.10	A	R / W	
				0.80±0.10	B	R / W	
				1.25±0.10	D	R	
				0.85±0.10	T	R / W	
	1206 (3216)	3.20±0.15	1.60±0.15	0.80±0.10	B	R / W	0.60±0.20 (0.5±0.25) ^{***}
				0.95±0.10	C	R	
				1.25±0.10	D	R	
				1.15±0.15	J	R	
				1.60±0.20	G	R	
	1210 (3225)	3.20±0.30	2.50±0.20	0.85±0.10	T	R	0.75±0.25
				1.25±0.10	D	R	
				1.60±0.20	G	R	
	1808 (4520)	4.50±0.40 (4.5+0.5/-0.3) ^{**}	2.03±0.25	2.00±0.20	K	R	0.75±0.25 (0.5±0.25) ^{***}
				2.50±0.30	M	R	
				1.25±0.10	D	R	
				1.40±0.15	F	R	
				1.60±0.20	G	R	
1812 (4532)	4.50±0.40 (4.5+0.5/-0.3) ^{**}	3.20±0.30	1.25±0.10	D	R	0.75±0.25 (0.5±0.25) ^{***}	
			1.60±0.20	G	R		
			2.00±0.20	K	R		
			2.50±0.30	M	R		
			2.80±0.30	U	R		

* R = Reflow soldering process ; W = Wave soldering process.

** For 1808_200~3kV, 1812_200V~3kV and safety certificated products.


*** For 1206_1000V~3kV, 1808_200~3kV, 1812_200~3kV and safety certificated products.

#1 : For 0603/X5R/X6S/6.3V/Cap≥10μF products.

#2 : For 0201/Cap≥0.68μF products. #3 : For 0201/Cap >1μF products.


Soft termination product please refer to individual sheet for detail.

■ Capacitor Arrays

Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	S (mm)	BW (mm)	P (mm)	
	0603 x 4 (0612 (1632))	3.20±0.15	1.60±0.15	0.80±0.10	B	0.30±0.20	0.40±0.15	0.80±0.15
	0402 x 4 (0508 (1220))	2.00±0.15	1.25±0.15	0.85±0.10	T	0.20±0.10	0.25±0.10	0.50±0.10

Reflow soldering process only.

■ Low Inductance Capacitors / RF series

Outline	Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	T _a min. (mm)	T _b min. (mm)	
	0612 (1632)	3.20±0.15	1.60±0.15	0.80±0.10	B	0.5	0.13
	0508 (1220)	2.00±0.15	1.25±0.15	0.85±0.10	T	0.38	0.13

FEATURES

- * A wide selection of sizes is available (0201 to 1812).
- * High capacitance in given case size.
- * Capacitor with lead-free termination (pure Tin).

GENERAL ELECTRICAL DATA

Dielectric	NP0	X7R	X6S	X5R	Y5V
Size	0201, 0402, 0603, 0805, 1206, 1210, 1812				
Capacitance range	0.1pF to 0.1μF	100pF to 47μF	0.1μF to 100μF	100pF to 220μF	0.01μF to 100μF
Capacitance tolerance	Cap≤5pF ^{#1} : A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%), K (±10%), M (±20%)	K (±10%), M (±20%)	K (±10%), M (±20%)	M (±20%), Z (-20/+80%)
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V		6.3V, 10V, 16V, 25V, 50V, 100V		
Operating temperature	-55 to +125°C		-55 to +105°C	-55 to +85°C	-25 to +85°C
Capacitance characteristic	±30ppm	±15%	±22%	±15%	+30/-80%
Termination	Ni/Sn (lead-free termination)				

#1: NP0, 0.1pF product only provide B tolerance


EXPLANATION OF PART NUMBERS

1206	F	104	Z	500	C	T
Size (Inch (mm)) 1206 (3216)	Dielectric F=Y5V	Capacitance 104=10x10 ⁴ =100nF	Tolerance Z=-20/+80%	Rated voltage 500=50 VDC	Termination C=Cu/Ni/Sn	Packaging style T=7" reeled


Please refer to page 2 "How to order" for more information.

ELECTRICAL CHARACTERISTICS


1) Frequency characteristics

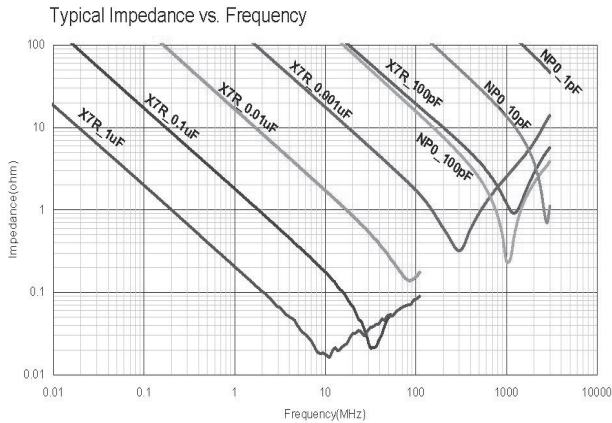


2) Capacitance Change - Typical aging rate

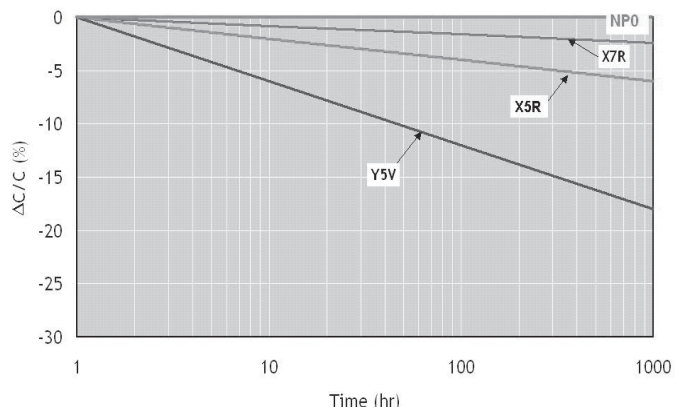

3) Temperature characteristics of capacitance (TCC)

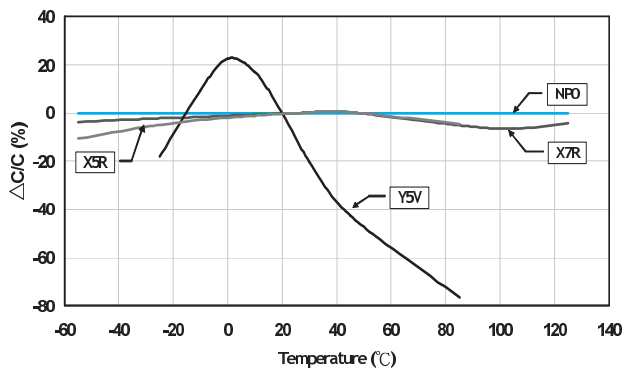

4) DC Bias characteristics

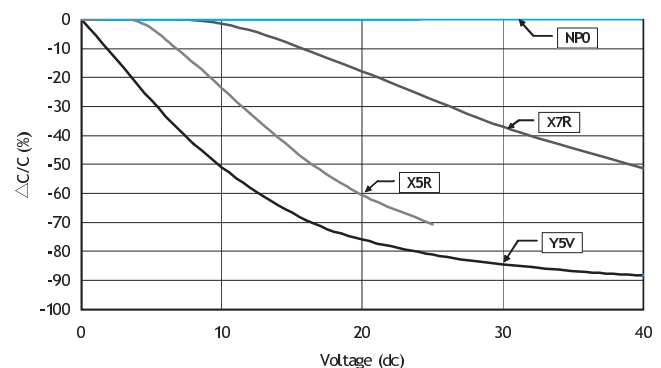

All above typical electronic characteristics are for reference only.
Please contact with Walsin representative for detail information of any specific item.

General Purpose Capacitors

6.3V~100V

■ CAPACITANCE RANGE

NPO Dielectric

Dielectric	NPO																													
	Size		0201			0402			0603			0805					1206					1210					1812			
	Rated Voltage (VDC)	16 25	50	10 16 25 50	100	10 16 25 50	100	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100	16	50	100
0.3pF (0R3)	L	L																												
0.4pF (0R4)	L	L																												
0.5pF (0R5)	L	L	N	N	S	S	A	A	A																					
0.6pF (0R6)	L	L	N	N	S	S	A	A	A																					
0.7pF (0R7)	L	L	N	N	S	S	A	A	A																					
0.8pF (0R8)	L	L	N	N	S	S	A	A	A																					
0.9pF (0R9)	L	L	N	N	S	S	A	A	A																					
1.0pF (1R0)	L	L	N	N	S	S	A	A	A																					
1.2pF (1R2)	L	L	N	N	S	S	A	A	A	B	B	B																		
1.5pF (1R5)	L	L	N	N	S	S	A	A	A	B	B	B																		
1.8pF (1R8)	L	L	N	N	S	S	A	A	A	B	B	B																		
2.0pF (2R0)	L	L	N	N	S	S	A	A	A	B	B	B																		
2.2pF (2R2)	L	L	N	N	S	S	A	A	A	B	B	B																		
2.7pF (2R7)	L	L	N	N	S	S	A	A	A	B	B	B																		
3.0pF (3R0)	L	L	N	N	S	S	A	A	A	B	B	B																		
3.3pF (3R3)	L	L	N	N	S	S	A	A	A	B	B	B																		
3.9pF (3R9)	L	L	N	N	S	S	A	A	A	B	B	B																		
4.0pF (4R0)	L	L	N	N	S	S	A	A	A	B	B	B																		
4.7pF (4R7)	L	L	N	N	S	S	A	A	A	B	B	B																		
5.0pF (5R0)	L	L	N	N	S	S	A	A	A	B	B	B																		
5.6pF (5R6)	L	L	N	N	S	S	A	A	A	B	B	B																		
6.0pF (6R0)	L	L	N	N	S	S	A	A	A	B	B	B																		
6.8pF (6R8)	L	L	N	N	S	S	A	A	A	B	B	B																		
7.0pF (7R0)	L	L	N	N	S	S	A	A	A	B	B	B																		
8.0pF (8R0)	L	L	N	N	S	S	A	A	A	B	B	B																		
8.2pF (8R2)	L	L	N	N	S	S	A	A	A	B	B	B																		
9.0pF (9R0)	L	L	N	N	S	S	A	A	A	B	B	B																		
10pF (100)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
12pF (120)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
15pF (150)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
18pF (180)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
22pF (220)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
27pF (270)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
33pF (330)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
39pF (390)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
47pF (470)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
56pF (560)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
68pF (680)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
82pF (820)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
100pF (101)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
120pF (121)	L	L	N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
150pF (151)			N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
180pF (181)			N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
220pF (221)			N	N	S	S	A	A	A	B	B	B	C	C	C	C	D	D												
270pF (271)			N		S	S	A	A	A	B	B	B	C	C	C	C	D	D												
330pF (331)			N		S	S	A	A	A	B	B	B	C	C	C	C	D	D												
390pF (391)			N		S	S	B	B	B	B	B	B	C	C	C	C	D	D												
470pF (471)			N		S	S	B	B	B	B	B	B	C	C	C	C	D	D												
560pF (561)			N		S	S	B	B	B	B	B	B	C	C	C	C	D	D												
680pF (681)			N		S	S	B	B	B	B	B	B	C	C	C	C	D	D												
820pF (821)			N		S	S	B	B	B	B	B	B	C	C	C	C	D	D												
1,000pF (102)			N		S	S	B	B	B	B	B	B	C	C	C	C	D	D												
1,200pF (122)					X	X	B	B	B	B	B	B	C	C	C	C	D	D												
1,500pF (152)					X	X	B	B	B	B	B	B	C	C	C	C	D	D												
1,800pF (182)					X		B	B	B	B	B	B	C	C	C	C	D	D												
2,200pF (222)					X		B	B	B	B	B	B	C	C	C	C	D	D												
2,700pF (272)					X		D	D	D	D	B	B	B	C	C	C	D	D												
3,300pF (332)					X		D	D	D	D	B	B	B	C	C	C	D	D												
3,900pF (392)					X		D	D	D	D	B	B	B	C	C	C	D	D												
4,700pF (472)					X		D	D	D	D	B	B	B	C	C	C	D	D												
5,600pF (562)					X		D	D	D	D	B	B	B	C	C	C	D	D												
6,800pF (682)					X		D	D	D	D	C	C	C	C	C	D	D	D												
8,200pF (822)					X		D	D	D	D	D	D	C	C	C	C	D	D												
0.010uF (103)					X		D	D	D	D	D	D	C	C	C	C	D	D												
0.012uF (123)							T	T	T	T	T	T	D	D	D	D	D	D												
0.015uF (153)							T	T	T	T	T	T	D	D	D	D	D	D												
0.018uF (183)							D	D	D	D	T	T	T																	
0.022uF (223)							D	D	D	D	T	T	T																	
0.027uF (273)											T	T	T																	
0.033uF (333)											T	T																		
0.039uF (393)											J	J																		
0.056uF (563)											J	J																		
0.068uF (683)											G	G																		
0.082uF (823)											G	G																		
0.1uF (104)											G	G																		

1. The letter in cell is expressed the symbol of product thickness.
 2. For more information about products with special capacitance or other data, please contact WTC local representative.

X7R Dielectric

Dielectric		X7R																																							
Size		0201			0402			0603					0805					1206					1210					1812													
Rated Voltage (VDC)	6.3 10 16	25	50	6.3 10	16 25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100	6.3	10	16	25	50	100	10	16	25	50	100	10	16	25	50	100						
capacitance	100pF (101)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B																						
	120pF (121)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B																						
	150pF (151)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	180pF (181)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	220pF (221)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	270pF (271)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	330pF (331)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	390pF (391)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	470pF (471)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	560pF (561)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	680pF (681)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	820pF (821)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B																
	1,000pF (102)	L	L	L	N	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D		
	1,200pF (122)	L	L	L	N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	
	1,500pF (152)	L	L		N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	1,800pF (182)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	2,200pF (222)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	2,700pF (272)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	3,300pF (332)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	3,900pF (392)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	4,700pF (472)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	5,600pF (562)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	6,800pF (682)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	8,200pF (822)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.010uF (103)	L			N	N	N		S	S	S	S	S		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.012uF (123)				N	N			S	S	S	S	X		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.015uF (153)				N	N			S	S	S	S	X		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.018uF (183)				N	N			S	S	S	S	X		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.022uF (223)				N	N	N		S	S	S	S	X		B	B	B	B	B		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.027uF (273)				N	N			S	S	S	S	X		B	B	B	B	D		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.033uF (333)				N	N	N		S	S	S	X	X		B	B	B	B	D		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.039uF (393)				N	N			S	S	S	X	X		B	B	B	B	D		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.047uF (473)				N	N	N		S	S	S	X	X		B	B	B	B	D		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.056uF (563)				N				S	S	S	X	X		B	B	B	B	D		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.068uF (683)				N		N		S	S	S	X	X		B	B	B	B	D		B	B	B	B	B	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.082uF (823)				N				S	S	S	X	X		B	B	B	B	D		B	B	B	B	D	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.10uF (104)				N	N	N		S	S	S	X	X		B	B	B	B	D		B	B	B	B	D	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	
	0.12uF (124)								S	S	X				B	B	B	D			B	B	B	D	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	
	0.15uF (154)								S	S	X				D	D	D	D			C	C	C	C	G	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	
	0.18uF (184)								S	S	X				D	D	D	D			C	C	C	C	G	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	
	0.22uF (224)				N	N			S	S	X	X			D	D	D	D	T		C	C	C	C	G	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	
	0.27uF (274)								X	X	X	X			D	D	D	I			C	C	C	D	G	C	C	C	C	G	D	D	D	D	D	D	D	D	D	D	
	0.33uF (334)								X	X	X	X			D	D	D	I			C	C	C	D	G	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	
	0.39uF (394)								X	X	X	X			D	D	D	I			C	C	J	P	G	C	C	C	D	M	D	D	D	D	D	D	D	D	D	D	
	0.47uF (474)				N				X	X	X	X	X		D	D	D	I	I		J	J	J	P	G	C	C	C	D	M	D	D	D	D	D	D	D	D	D	K	K
	0.56uF (564)								X	X	X				D	D	D				J	J	J	P	P	D	D	D	D	M	D	D	D	D	D	D	D	D	D	K	K
	0.68uF (684)								X	X	X				D	D	D				J	J	J	P	P	D	D	D	D	K	D	D	D	D	D	D	D	D	D	K	K
0.82uF (824)								X	X	X				D	D	D				J	J	J	P	P	D	D	D	D	K	D	D	D	D	D	D	D	D	D	K	K	
1.0uF (105)				N				X	X	X	X	X		D	D	D	I			J	J	J	P	P	D	D	D	D	K	D	D	D	D	D	D	D	D	D	K	K	
1.5uF (155)														I	I	I				J	J	J	P					K	G	M	M								K	K	
2.2uF (225)								X	X					I	I	I	I			J	J	J	P	P	P			K	G	M	M							M	M		
3.3uF (335)																				P	P	P	P					K	G												
4.7uF (475)														I	I	I	I			P	P	P	P					K	K	K	M										
6.8uF (685)																																									
10uF (106)														I	I	I				P	P	P	P					K	K	K	M										
22uF (226)																				P	P	P						M	M	M											
47uF (476)																												M													

1. The letter in cell is expressed the symbol of product thickness.

Y5V Dielectric (0402, 0603, 0805 Size)

Dielectric		Y5V															
Size		0402					0603					0805					
Rated Voltage (VDC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100
capacitance	0.010uF (103)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.015uF (153)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.022uF (223)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.033uF (333)		N	N	N	N		S	S	S	S		A	A	A	A	B
	0.047uF (473)		N	N	N			S	S	S	S		A	A	A	A	B
	0.068uF (683)		N	N	N			S	S	S	S		A	A	A	A	B
	0.10uF (104)		N	N	N			S	S	S	S		A	A	A	A	B
	0.15uF (154)		N	N				S	S	S	S		A	A	A	A	
	0.22uF (224)	N	N	N			S	S	S	S	S		A	A	A	A	
	0.33uF (334)	N	N	N				S	S	S	X		B	B	B	B	
	0.47uF (474)	N	N	N				S	S	X	X		B	B	B	B/D	
	0.68uF (684)	N						S	X	X			B	B	D	D	
	1.0uF (105)	N	N					S	X	X			B	B	D	D	
	1.5uF (155)							S					D	D			
	2.2uF (225)						S	S	X				D	D	I		
	3.3uF (335)												D	D			
	4.7uF (475)						X	X					D	D	I		
	6.8uF (685)													I			
10uF (106)												I	I	I			
22uF (226)												I	I				

Y5V Dielectric (1206, 1210, 1812 Size)

Dielectric		Y5V																		
Size		1206						1210						1812						
Rated Voltage (VDC)		6.3	10	16	25	35	50	100	6.3	10	16	25	35	50	100	10	16	25	50	100
capacitance	0.010uF (103)		B	B	B		B	B							C					D
	0.015uF (153)		B	B	B		B	B							C					D
	0.022uF (223)		B	B	B		B	B							C					D
	0.033uF (333)		B	B	B		B	B							C					D
	0.047uF (473)		B	B	B		B	B							C					D
	0.068uF (683)		B	B	B		B	B							C					D
	0.10uF (104)		B	B	B		B	B		C	C	C		C	C	D	D	D	D	D
	0.15uF (154)		B	B	B		B	C		C	C	C		C	C	D	D	D	D	D
	0.22uF (224)		B	B	B		B	C		C	C	C		C	C	D	D	D	D	D
	0.33uF (334)		B	B	B		B			C	C	C		C	C	D	D	D	D	D
	0.47uF (474)		B	B	B		B			C	C	C		C		D	D	D	D	D
	0.68uF (684)		B	B	B		B			C	C	C		C		D	D	D	D	D
	1.0uF (105)		C	C	C		C/D			C	C	C		C		D	D	D	D	D
	1.5uF (155)		C	C	C					C	C	C				D	D	D	D	
	2.2uF (225)		C	C	C		J			C	C	C		G		D	D	D	D	
	3.3uF (335)		J	J	J					C	C	C				D	D	D	D	
	4.7uF (475)		J	J	J	J	P			C	C	D		G		D	D	D	D	
	6.8uF (685)		J	J						C	C	D				D	D	D	D	
10uF (106)		J	J	P					D	D	G	K			D	D	D	K		
22uF (226)		P	P							K	K									
47uF (476)	P								K	K						M				
100uF (107)									M											

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Ultra-small Capacitors

01R5 Series

FEATURES

- * High capacitance in unit size.
- * High precision dimensional tolerances.
- * Suitable used in high-accuracy automatic mounting machine.

GENERAL ELECTRICAL DATA

Size	01R5		
Dielectric	NP0	X7R	X5R
Capacitance*	0.2pF to 100pF	100pF & 1000pF	1000pF to 0.1μF
Capacitance tolerance**	Cap≤10pF: C (±0.25pF) Cap>10pF: J (±5%)	K (±10%), M (±20%)	
Rated voltage (WVDC)	16V	10V	6.3V, 10V
Operating temperature	-55 to +125°C	-55 to +125°C	-55 to +85°C
Capacitance change	±30ppm	±15%	
Termination	Ni/Sn (lead-free termination)		

EXPLANATION OF PART NUMBERS

01R5	N	100	J	160	C	T
Size (Inch (mm))	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging style
01R5 =01005 (0402)	N=NP0(C0G)	100=10x10 ⁰ =10pF	J=±5%	160=16 VDC	C=Cu/Ni/Sn	T=7" reeled

Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

SIZE	01R5
DIELECTRIC	NP0
RATED VOLTAGE (VDC)	16
0.2pF (0R2)	V
0.3pF (0R3)	V
0.4pF (0R4)	V
0.5pF (0R5)	V
1.0pF (1R0)	V
1.5pF (1R5)	V
2.0pF (2R0)	V
3.0pF (3R0)	V
4.0pF (4R0)	V
5.0pF (5R0)	V
6.0pF (6R0)	V
7.0pF (7R0)	V
8.0pF (8R0)	V
9.0pF (9R0)	V
10pF (100)	V
12pF (120)	V
15pF (150)	V
18pF (180)	V
22pF (220)	V
27pF (270)	V
33pF (330)	V
39pF (390)	V
47pF (470)	V
56pF (560)	V
68pF (680)	V
82pF (820)	V
100pF (101)	V

SIZE	01R5
DIELECTRIC	X7R
RATED VOLTAGE (VDC)	10
100pF (101)	V
120pF (121)	
150pF (151)	V
180pF (181)	
220pF (221)	V
270pF (271)	
330pF (331)	V
390pF (391)	
470pF (471)	V
560pF (561)	
680pF (681)	
820pF (821)	
1,000pF (102)	V

SIZE	01R5	
DIELECTRIC	X5R	
RATED VOLTAGE (VDC)	6.3	10
1,000pF (102)	V	V
1,500pF (152)		V
2,200pF (222)		V
3,300pF (332)		V
4,700pF (472)		V
6,800pF (682)		V
0.010μF (103)	V	V
0.015μF (153)		
0.022μF (223)	V	
0.033μF (333)	V	
0.047μF (473)	V	
0.068μF (683)	V	
0.10μF (104)	V	

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * High voltage in a given case size.
- * High stability and reliability.

GENERAL ELECTRICAL DATA

Dielectric	NPO	X7R	Y5V
Size	0603, 0805, 1206, 1210, 1808, 1812		0805, 1206, 1210, 1812
Capacitance	0.5pF to 6800pF	100pF to 1.0μF	0.01μF to 0.68μF
Capacitance tolerance	Cap≤5pF: C (±0.25pF) 5pF<Cap<10pF: D (±0.5pF) Cap≥10pF: J (±5%), K (±10%)	K (±10%), M (±20%)	Z (-20/+80%)
Rated voltage (WVDC)	200V to 3kV		200V, 250V
DF/ Q	Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	≤2.5%	≤5%
Insulation resistance at Ur	Ur=200~630V: ≥10GΩ or RxC≥100Ω-F whichever is smaller Ur=1000~3000V: ≥10GΩ		
Dielectric strength	200~300V: ≥2 x WVDC 500~999V: ≥1.5 x WVDC 1000~3000V: ≥1.2 x WVDC		
Operating temperature	-55 to +125°C		-25 to +85°C
Capacitance characteristic	±30ppm	±15%	+30/-80%
Termination	Ni/Sn (lead-free termination)		

EXPLANATION OF PART NUMBERS

1808	N	100	J	202	C	T
Size (Inch (mm))	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging style
1808 (4520)	N=NPO(C0G)	100=10x10 ⁰ =10pF	J=±5%	202=2000 VDC	C=Cu/Ni/Sn	T=7" reeled

Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

Y5V Dielectric 200V to 250V

DIELECTRIC		Y5V							
SIZE		0805		1206		1210		1812	
RATED VOLTAGE (VDC)		200	250	200	250	200	250	200	250
Capacitance	0.010μF (103)	B	B	B	B	C	C	D	D
	0.015μF (153)	B	B	B	B	C	C	D	D
	0.022μF (223)	B	B	B	B	C	C	D	D
	0.033μF (333)	B	B	B	B	C	C	D	D
	0.047μF (473)	B	B	B	B	C	C	D	D
	0.068μF (683)	B	B	B	B	C	C	D	D
	0.10μF (104)			B	B	C	C	D	D
	0.15μF (154)			C	C	C	C	D	D
	0.22μF (224)							D	D
	0.33μF (334)							D	D
	0.47μF (474)							D	D
	0.68μF (684)							D	D

- The letter in cell is expressed the symbol of product thickness.
- For more information about products with special capacitance or other data, please contact WTC local representative.

Middle and High Voltage Capacitors

200V to 3kV

NPO Dielectric 200V to 3kV

DIELECTRIC		NPO																													
SIZE		0603				0805				1206				1210				1808				1812									
RATED VOLTAGE (VDC)		200	250	200	250	500	630	200	250	500	630	1000	2000	200	250	500	630	1000	2000	500	630	1000	2000	3000	200	250	500	630	1000	2000	3000
0.5pF (0R5)		S		A	A	A																									
1.0pF (1R0)		S		A	A	A																									
1.2pF (1R2)		S		A	A	A																									
1.5pF (1R5)		S		A	A	A	B	B	B	B	B																				
1.8pF (1R8)		S		A	A	A	B	B	B	B	B																				
2.2pF (2R2)		S		A	A	A	B	B	B	B	B									D	D	D	D								
2.7pF (2R7)		S		A	A	A	B	B	B	B	B									D	D	D	D								
3.3pF (3R3)		S		A	A	A	B	B	B	B	B									D	D	D	D								
3.9pF (3R9)		S		A	A	A	B	B	B	B	B									D	D	D	D								
4.7pF (4R7)		S		A	A	A	B	B	B	B	B									D	D	D	D								
5.6pF (5R6)		S		A	A	A	B	B	B	B	B									D	D	D	D								
6.8pF (6R8)		S		A	A	A	B	B	B	B	B									D	D	D	D								
8.2pF (8R2)		S		A	A	A	B	B	B	B	B									D	D	D	D								
10pF (100)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
12pF (120)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
15pF (150)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
18pF (180)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
22pF (220)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
27pF (270)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
33pF (330)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
39pF (390)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
47pF (470)		S		A	A	A	B	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	
56pF (560)		S		A	A	A	B	B	B	B	B	C	D	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	D	
68pF (680)		S		A	A	A	B	B	B	B	B	C	D	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	D	
82pF (820)		S		A	A	B	B	B	B	B	B	D	D	C	C	C	C	D	D	D	D	D	D	D	D	D	D	D	D	D	
100pF (101)		S		A	B	B	B	B	B	B	B	D	D	C	C	C	D	D	D	D	D	D	K	D	D	D	D	D	D	D	
120pF (121)		S		A	B	D	B	B	B	B	B	D	G	C	C	C	D	D	D	D	D	D	K	D	D	D	D	D	D	D	
150pF (151)		S		B	D	D	B	B	B	B	B	D	G	C	C	C	D	G	D	D	D	K	K	D	D	D	D	D	D	D	
180pF (181)		S		B	D	D	B	B	B	B	B	G	G	C	C	C	D	G	D	D	D	K	K	D	D	D	D	D	D	K	
220pF (221)		S		D	D	D	B	B	B	B	B	G	G	C	C	C	G	G	D	D	D	K	K	D	D	D	D	D	D	K	
270pF (271)		X		D	D	D	B	C	C	C	G			C	C	C	G			K	K	K	K	D	D	D	D	D	K	K	
330pF (331)		X		D	D	D	B	C	C	C	G			C	C	C	G			K	K	K	K	D	D	D	D	D	K	K	
390pF (391)		X		D	D	D	B	C	C	C	G			C	C	C	G			K	K	K		D	D	D	D	D	K	K	
470pF (471)		X		D	D	I	C	C	C	C	G			C	C	C	G			K	K	K		D	D	D	D	K	K	K	
560pF (561)				D	D	I	C	D	D	D	G			C	C	C				K	K	K		D	D	D	D	K	K		
680pF (681)				D	D	I	C	D	D	D	G			C	C	C				K	K	K		D	D	D	D	K	K		
820pF (821)				D	D	I	C	G	G	G	G			C	C	C				K	K			D	D	D	D	K	K		
1,000pF (102)				D	D	I	C	G	G	G	G			D	D	D				K	K			D	D	D	D	K	K		
1,200pF (122)				D	D		C	G	G	G				D	D	D				K				D	D	D	D	K			
1,500pF (152)				D	D		D	G	G					D	D	D				K				D	D	D	D	K			
1,800pF (182)				D	D		D	G	G					D	D	D				K				D	D	D	D				
2,200pF (222)				D	D		D	G	G					D	D	D				K				D	D	D	D				
2,700pF (272)							D	G						D	D	D								D	D	D	D				
3,300pF (332)							D	G						D	D	D								D	D	D	D				
3,900pF (392)							D	G						D	D	D								D	D	D	D				
4,700pF (472)							D	G																D	D	D	D				
5,600pF (562)																								D	D	D	D				
6,800pF (682)																								D	D	D	D				

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

X7R Dielectric 200V to 3kV

DIELECTRIC		X7R																						
SIZE	0603	0805			1206				1210				1808			1812								
RATED VOLTAGE (VDC)	200 250	200 250	500 630	1000	200 250	500 630	1000	2000	200 250	500 630	1000	2000	500 630	1000	2000	3000	200	250	500	630	1000	2000	3000	
Capacitance	100pF (101)	X	B	B	B																			
	120pF (121)	X	B	B	B																			
	150pF (151)	X	B	B	B	D	D	D	D				D	D	D	D								
	180pF (181)	X	B	B	B	D	D	D	D				D	D	D	D								
	220pF (221)	X	B	B	B	D	D	D	D				D	D	D	D								
	270pF (271)	X	B	B	B	D	D	D	D				D	D	D	D					D	D		
	330pF (331)	X	B	B	B	D	D	D	D				D	D	D	D	K				D	D		
	390pF (391)	X	B	B	B	D	D	D	D				D	D	D	D	K				D	D		
	470pF (471)	X	B	B	B	D	D	D	D				D	D	D	D	K				D	D		
	560pF (561)	X	B	B	B	D	D	D	D				D	D	D	D	K				D	D		
	680pF (681)	X	B	B	B	D	D	D	D				D	D	D	D	K				D	D	K	K
	820pF (821)	X	B	B	B	D	D	D	G				D	D	D	D	K				D	D	K	K
	1,000pF (102)	X	B	B	B	D	D	D	G	C	D	D	D	D	D	K	K	D			D	D	D	K
	1,200pF (122)	X	B	B	B	D	D	D	G	C	D	D		D	D	K	K	D			D	D	D	K
	1,500pF (152)	X	B	B	D	D	D	D	G	C	D	D		D	D	K	K	D			D	D	D	K
	1,800pF (182)	X	B	B	D	D	D	D	G	C	D	D		D	D	K	K	D			D	D	D	M
	2,200pF (222)	X	B	B	D	D	D	D	G	C	D	D		D	D	K		D			D	D	D	M
	2,700pF (272)	X	B	B		D	D	D	G	C	D	D		D	D			D			D	D	D	M
	3,300pF (332)	X	B	B		D	D	D	G	C	D	D		D	D			D			D	D	D	M
	3,900pF (392)	X	B	B		D	D	D		C	D	G		D	D			D			D	D	D	K
	4,700pF (472)	X	B	D		D	D	D		C	D	G		D	D			D			D	D	D	K
	5,600pF (562)	X	D	D		D	D	D		C	D	G		K	K			D			D	D	D	
	6,800pF (682)	X	D	D		D	D	D		C	D	G		K	K			D			D	D	D	
	8,200pF (822)	X	D	D		D	D	D		C	D	G		K	K			D			D	D	D	
	0.010μF (103)	X	D	D		D	D	D		C	D	G		K	K			D			D	D	D	
	0.012μF (123)		D	D		D	D	G		C	D	G		K				D			D	D	K	
	0.015μF (153)		D	D		D	D	G		C	D	G		K				D			D	D	K	
	0.018μF (183)		D	D		D	D			C	D	G		K				D			D	D		
	0.022μF (223)		D	D		D	D			C	D	G		K				D			D	D		
	0.027μF (273)		D			D	G			C	D	G		K				D			D	D		
	0.033μF (333)		D			G	G			C	G			K				D			D	D		
	0.039μF (393)		D			G	G			C	G			K				D			D	D		
	0.047μF (473)		D			G	G			D	G			K				D			D	D		
	0.056μF (563)		D			G	G			D	G			K				D			D	K		
	0.068μF (683)		D			G				G	G			K				D			D	K		
	0.082μF (823)					G				G	K							D			D	K		
	0.10μF (104)					G				G	K							D			D	K		
	0.12μF (124)									G								D			D	M		
	0.15μF (154)									M								K			D	M		
	0.18μF (184)									M								K			D	M		
0.22μF (224)									M								K			D	M			
0.27μF (274)									M								K			D				
0.33μF (334)									M								K			D				
0.39μF (394)									M								K			D				
0.47μF (474)									M								K			D				
0.56μF (564)																	M			D				
0.68μF (684)																	M			D				
0.82μF (824)																	M			D				
1.00μF (105)																	M			D				

- The letter in cell is expressed the symbol of product thickness.
- For more information about products with special capacitance or other data, please contact WTC local representative.

High Q / Low ESR Capacitors HH Series

FEATURES

- * High Q and low ESR performance at high frequency.
- * Quality improvement of telephone calls for low power loss and better performance.

GENERAL ELECTRICAL DATA

Dielectric	NPO
Size	0402, 0603, 0805
Capacitance	0402: 0.1pF to 470pF 0603: 0.5pF to 3300pF 0805: 0.5pF to 150pF
Capacitance tolerance	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)
Rated voltage (WVDC)	16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V
Q	Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000
Insulation resistance at Ur	≥10GΩ
Operating temperature	-55 to +125°C
Capacitance change	±30ppm
Termination	Ni/Sn (lead-free termination)

EXPLANATION OF PART NUMBERS

HH	15	N	100	G	500	C	T
Series HH=High Q/ Low ESR	Size (Inch (mm)) 15=0402 (1005)	Dielectric N=NP0(C0G)	Capacitance 100=10x10 ⁹ =10pF	Tolerance G=±2%	Rated voltage 500=50 VDC	Termination C=Cu/Ni/Sn	Packaging T=7" reeled

* Please refer to page 2 "How to order" for more information.

ELECTRICAL CHARACTERISTICS

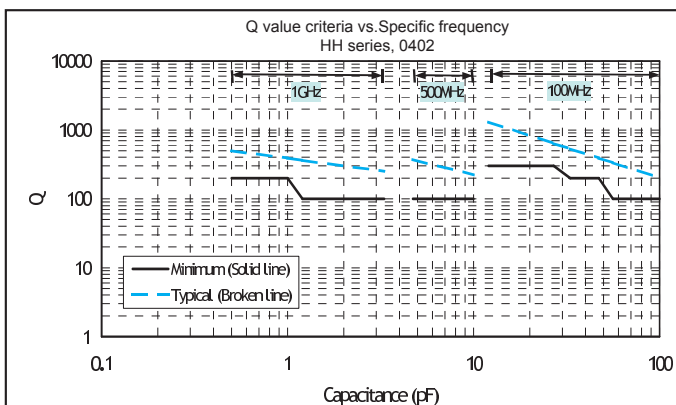


Fig. 1 Q factor specification vs. Specific frequency 0402

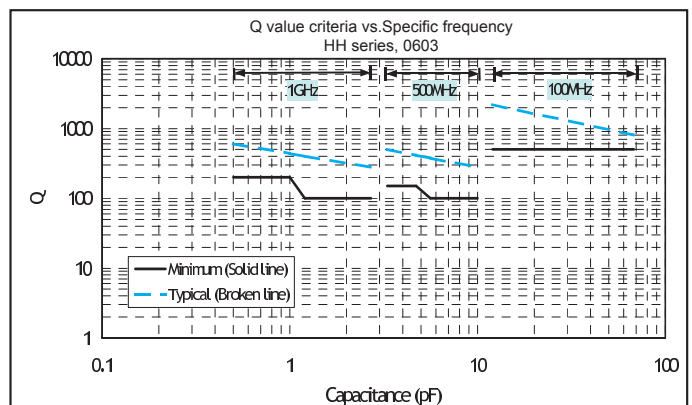


Fig. 2 Q factor specification vs. Specific frequency 0603

■ CAPACITANCE RANGE

DIELECTRIC		NPO											
SIZE		0402				0603				0805			
RATED VOLTAGE (VDC)		16	25	50	100	16	25	50	100	50	100	200,250	500,630
Capacitance	0.1pF (0R1)	N^	N^	N^	N^								
	0.2pF (0R2)	N^	N^	N^	N^								
	0.3pF (0R3)	N^	N^	N^	N^								
	0.4pF (0R4)	N^	N^	N^	N^								
	0.5pF (0R5)	N^	N^	N^	N^	S^	S^	S^	S^	B	B		
	0.6pF (0R6)	N^	N^	N^	N^	S^	S^	S^	S^	B	B		
	0.7pF (0R7)	N^	N^	N^	N^	S^	S^	S^	S^	B	B		
	0.8pF (0R8)	N^	N^	N^	N^	S^	S^	S^	S^	B	B		
	0.9pF (0R9)	N^	N^	N^	N^	S^	S^	S^	S^	B	B		
	1.0pF (1R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	1.2pF (1R2)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	1.5pF (1R5)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	1.8pF (1R8)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	2.0pF (2R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	2.2pF (2R2)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	2.7pF (2R7)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	3.0pF (3R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	3.3pF (3R3)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	3.9pF (3R9)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	4.0pF (4R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	4.7pF (4R7)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	5.0pF (5R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	5.6pF (5R6)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	6.0pF (6R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	6.8pF (6R8)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	7.0pF (7R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	8.0pF (8R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	8.2pF (8R2)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	9.0pF (9R0)	N^	N^	N^	N^	S^	S^	S^	S^	B	B	B	B
	10pF (100)	N	N	N	N	S	S	S	S	B	B	B	B
	12pF (120)	N	N	N	N	S	S	S	S	B	B	B	B
	15pF (150)	N	N	N	N	S	S	S	S	B	B	B	B
	18pF (180)	N	N	N	N	S	S	S	S	B	B	B	B
22pF (220)	N	N	N	N	S	S	S	S	B	B	B	B	
27pF (270)	N	N	N	N	S	S	S	S	B	B	B	B	
33pF (330)	N	N	N	N	S	S	S	S	B	B	B	B	
39pF (390)	N	N	N	N	S	S	S	S	B	B	B	B	
47pF (470)	N	N	N	N	S	S	S	S	B	B	B	B	
56pF (560)	N	N	N	N	S	S	S	S	B	B	B	B	
68pF (680)	N	N	N	N	S	S	S	S	B	B	B	B	
82pF (820)	N	N	N	N	S	S	S	S	B	B	B	B	
100pF (101)	N	N	N	N	S	S	S	S	B	B	B	B	
120pF (121)	N	N	N	N	S	S	S	S	D	D	D	D	
150pF (151)	N	N	N	N	S	S	S	S	D	D	D	D	
180pF (181)	N	N	N	N	S	S	S	S			D	D	
220pF (221)	N	N	N	N	S	S	S	S			D	D	
270pF (271)	N	N	N		S	S	S	S			D	D	
330pF (331)	N	N	N		S	S	S	S			D	D	
390pF (391)	N	N	N		S	S	S	S			D	D	
470pF (471)	N	N	N		S	S	S	S					
560pF (561)					S	S	S	S					
680pF (681)					S	S	S	S					
820pF (821)					S	S	S	S					
1,000pF (102)					S	S	S	S					
1,200pF (122)					X	X	X						
1,500pF (152)					X	X	X						
1,800pF (182)					X	X	X						
2,200pF (222)					X	X	X						
2,700pF (272)					X	X	X						
3,300pF (332)					X	X	X						

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * Ultra high Q and low ESR performance at high frequency.
- * Quality improvement of telephone calls for low power loss and better performance.



GENERAL ELECTRICAL DATA



Dielectric	NPO
Size	0201, 0402, 0603, 0805
Capacitance	0.1pF to 100pF
Capacitance tolerance	Cap≤5pF: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: B (±0.1pF), C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)
Rated voltage (WVDC)	6.3V, 10V, 25V, 50V, 100V, 250V, 500V
Q	Cap≥30pF, Q≥1000 Cap<30pF, Q≥400+20C
Insulation resistance at Ur	≥10GΩ
Operating temperature	-55 to +125°C
Capacitance change	±30ppm/°C; 0201Cap≥22pF, ±60ppm/°C
Termination	Ni/Sn (lead-free termination)

EXPLANATION OF PART NUMBERS

RF	15	N	100	G	500	C	T
Series RF=Microwave	Size (Inch (mm)) 15=0402 (1005)	Dielectric N=NPO	Capacitance 100=10x10 ⁰ =10pF	Tolerance G=±2%	Rated voltage 500=50 VDC	Termination C=Cu/Ni/Sn	Packaging T=7" reeled

* Please refer to page 2 "How to order" for more information.

ELECTRICAL CHARACTERISTICS

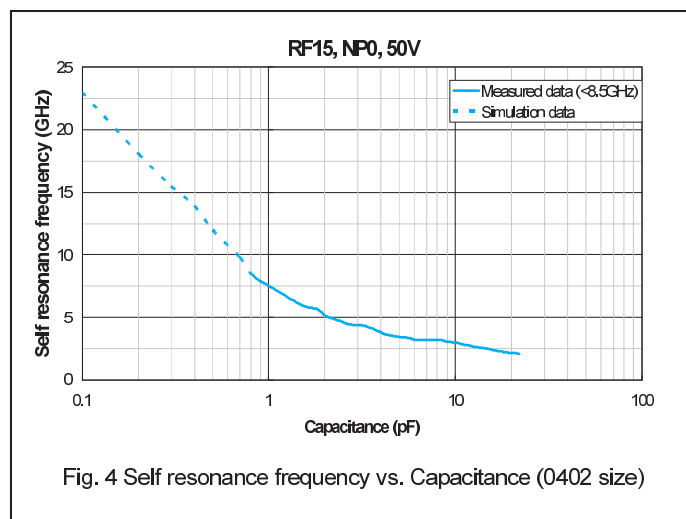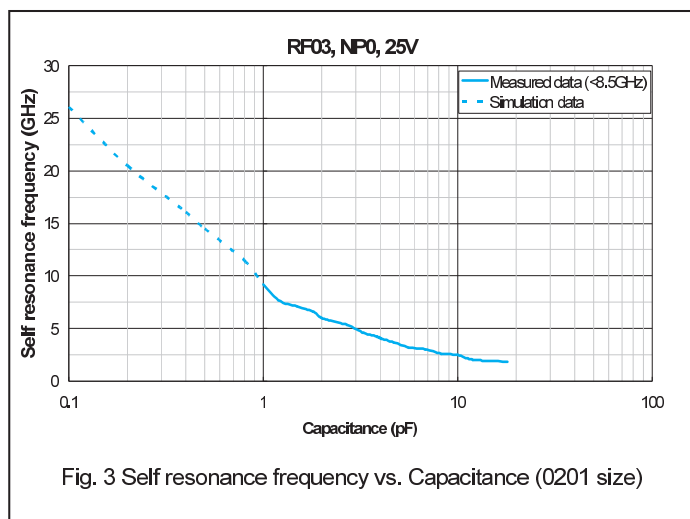

■ CAPACITANCE RANGE

DIELECTRIC		NPO													
SIZE		0201				0402			0603			0805			
RATED VOLTAGE (VDC)		6.3	10	25	50	25	50	100	50	100	250	50	100	250	500
Capacitance	0.1pF (0R1)	L	L	L	L	N	N	N							
	0.2pF (0R2)	L	L	L	L	N	N	N							
	0.3pF (0R3)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	0.4pF (0R4)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	0.5pF (0R5)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	0.6pF (0R6)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	0.7pF (0R7)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	0.8pF (0R8)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	0.9pF (0R9)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	1.0pF (1R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	1.2pF (1R2)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	1.5pF (1R5)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	1.8pF (1R8)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	2.0pF (2R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	2.2pF (2R2)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	2.7pF (2R7)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	3.0pF (3R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	3.3pF (3R3)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	3.9pF (3R9)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	4.0pF (4R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	4.7pF (4R7)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	5.0pF (5R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	5.6pF (5R6)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	6.0pF (6R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	6.8pF (6R8)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	7.0pF (7R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	8.0pF (8R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	8.2pF (8R2)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	9.0pF (9R0)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
	10pF (100)	L	L	L	L	N	N	N	S	S	S	T	T	T	T
11pF (110)	L	L	L	L	N	N	N	S	S	S	T	T	T	T	
12pF (120)	L	L	L	L	N	N	N	S	S	S	T	T	T	T	
13pF (130)	L	L	L	L	N	N	N	S	S	S	T	T	T	T	
15pF (150)	L	L	L	L	N	N	N	S	S	S	T	T	T	T	
16pF (160)	L	L	L	L	N	N	N	S	S	S	T	T	T	T	
18pF (180)	L	L	L	L	N	N	N	S	S	S	T	T	T	T	
20pF (200)	L	L	L	L	N	N	N	S	S	S	T	T	T	T	
22pF (220)	L	L	L		N	N	N	S	S	S	T	T	T	T	
24pF (240)	L	L	L		N	N	N	S	S	S	T	T	T	T	
27pF (270)	L	L	L		N	N	N	S	S	S	T	T	T	T	
30pF (300)	L	L	L		N	N	N	S	S	S	T	T	T	T	
33pF (330)	L	L	L		N	N	N	S	S	S	T	T	T	T	
36pF (360)					N	N	N	S	S	S	T	T	T	T	
39pF (390)					N	N	N	S	S	S	T	T	T	T	
43pF (430)					N	N	N	S	S	S	T	T	T	T	
47pF (470)					N	N	N	S	S	S	T	T	T	T	
56pF (560)					N	N	N				T	T	T	T	
68pF (680)					N	N	N				T	T	T	T	
82pF (820)					N	N	N				T	T	T	T	
100pF (101)					N	N	N				T	T	T	T	

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Soft Termination Capacitors

SH/ SG Series

■ FEATURES

* MLCC's terminations build a soft & flexible polymer layer to withstand high bending stress in SMT line.

* Available for any item in standard series range.

■ GENERAL ELECTRICAL DATA

Dielectric	NP0	X7R
Size	0603, 0805, 1206, 1210, 1808, 1812	
Capacitance range	0.5pF to 0.015pF	100pF to 10μF
Capacitance tolerance	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%), K (±10%), M (±20%)
Rated voltage (WVDC)	10V, 16V, 25V, 50V, 100V, 200V, 250V, 500V, 630V, 1000V, 2000V, 3000V	
Operating temperature	-55 to +125°C	
Capacitance characteristic	±30ppm	±15%
Termination	Ni/Sn (lead-free termination)	

■ EXPLANATION OF PART NUMBERS

SH	31	N	100	D	501	C	T
Series	Size (Inch (mm))	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
SH=With Ag polymer SG=With Cu polymer	31=1206 (3216)	N=NP0(C0G)	100=10x10 ⁰ =10pF	D=±0.5pF	501=50 VDC	C=Cu/Ni/Sn	T=7" reeled

* Please refer to page 2 "How to order" for more information.

■ PACKAGING DIMENSION AND QUANTITY

Size	L(mm)	W(mm)	Thickness (mm)/Symbol		Paper tape		Plastic tape	
					7" reel	13" reel	7" reel	13" reel
0402 (1005)	1.00±0.20	0.50±0.20	0.50±0.20	E	1,000	-	-	-
0603 (1608)	1.60±0.20	0.80±0.10	0.80±0.07	S	4,000	15,000	-	-
	1.60+0.20/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	X	4,000	15,000	-	-
0805 (2012)	2.00±0.20	1.25±0.10	0.60±0.10	A	4,000	15,000	-	-
			0.80±0.10	B	4,000	15,000	-	-
			1.25±0.10	D	-	-	3,000	10,000
	2.00+0.25/-0.2	1.25±0.20	1.25±0.20	I	-	-	3,000	10,000
1206 (3216)	3.20+0.4/-0.1	1.60±0.15	0.80±0.10	B	4,000	15,000	-	-
			0.95±0.10	C	-	-	3,000	10,000
			1.15±0.15	J	-	-	3,000	10,000
			1.25±0.10	D	-	-	3,000	10,000
			1.60±0.20	G	-	-	2,000	10,000
	3.20+0.4/-0.1	1.60+0.30/-0.10	1.60+0.30/-0.10	P	-	-	2,000	9,000
1210 (3225)	3.20±0.40	2.50±0.20	0.95±0.10	C	-	-	3,000	10,000
			1.25±0.10	D	-	-	3,000	10,000
			1.60±0.20	G	-	-	2,000	10,000
	3.20±0.50	2.50±0.30	2.00±0.20	K	-	-	1,000	6,000
			2.50±0.30	M	-	-	1,000	6,000
1808 (4520)	4.50+0.60/-0.4	2.03±0.25	1.25±0.10	D	-	-	2,000	-
			2.00±0.20	K	-	-	1,000	-
1812 (4532)	4.50+0.60/-0.4	3.20±0.30	1.25±0.10	D	-	-	1,000	-
			2.00±0.20	K	-	-	1,000	-
			2.50±0.30	M	-	-	500	3,000

Unit: pieces

■ CAPACITANCE RANGE(SH Series)

NPO Dielectric

DIELECTRIC		NPO																			
		0402		0603		0805			1206				1210				1808				
SIZE		10, 16, 25, 50	100	10, 16, 25, 50	200, 250	10, 16, 25, 50, 100	200	250, 500, 600	10, 16, 25, 50, 100	200	250, 500, 600	1000	2000	10, 16, 25, 50, 100	200, 250	500, 600	1000	2000	500, 630, 1000, 2000	3000	
RATED VOLTAGE (VDC)																					
Capacitance	0.5pF (0R5)	E	E	S	S	A	A	A													
	1.0pF (1R0)	E	E	S	S	A	A	A													
	1.2pF (1R2)	E	E	S	S	A	A	A													
	1.5pF (1R5)	E	E	S	S	A	A	A	B	B	B	B	B								
	1.8pF (1R8)	E	E	S	S	A	A	A	B	B	B	B	B								
	2.2pF (2R2)	E	E	S	S	A	A	A	B	B	B	B	B							D	
	2.7pF (2R7)	E	E	S	S	A	A	A	B	B	B	B	B							D	
	3.3pF (3R3)	E	E	S	S	A	A	A	B	B	B	B	B							D	
	3.9pF (3R9)	E	E	S	S	A	A	A	B	B	B	B	B							D	
	4.7pF (4R7)	E	E	S	S	A	A	A	B	B	B	B	B							D	
	5.6pF (5R6)	E	E	S	S	A	A	A	B	B	B	B	B							D	D
	6.8pF (6R8)	E	E	S	S	A	A	A	B	B	B	B	B							D	D
	8.2pF (8R2)	E	E	S	S	A	A	A	B	B	B	B	B							D	D
	10pF (100)	E	E	S	S	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D
	12pF (120)	E	E	S	S	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D
	15pF (150)	E	E	S	S	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D
	18pF (180)	E	E	S	S	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D
	22pF (220)	E	E	S	S	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D
	27pF (270)	E	E	S	S	A	A	A	B	B	B	B	B	C	C	C	C	C	C	D	D
	33pF (330)	E	E	S	S	A	A	A	B	B	B	B	C	C	C	C	C	C	C	D	D
	39pF (390)	E	E	S	S	A	A	A	B	B	B	B	C	C	C	C	C	C	C	D	D
	47pF (470)	E	E	S	S	A	A	A	B	B	B	B	C	C	C	C	C	C	C	D	D
	56pF (560)	E	E	S	S	A	A	A	B	B	B	C	D	C	C	C	C	C	D	D	D
	68pF (680)	E	E	S	S	A	A	A	B	B	B	C	D	C	C	C	C	C	D	D	D
	82pF (820)	E	E	S	S	A	A	B	B	B	B	D	D	C	C	C	C	C	D	D	D
	100pF (101)	E	E	S	S	A	A	B	B	B	B	D	D	C	C	C	D	D	D	D	K
	120pF (121)	E	E	S	S	A	A	D	B	B	B	D	G	C	C	C	D	D			
	150pF (151)	E	E	S	S	A	B	D	B	B	B	D	G	C	C	C	D	G			
	180pF (181)	E	E	S	S	A	B	D	B	B	B	G	G	C	C	C	D	G			
	220pF (221)	E	E	S	S	A	D	D	B	B	B	G	G	C	C	C	G	G			
	270pF (271)	E		S	X	A	D	D	B	B	C	G		C	C	C	G				
	330pF (331)	E		S	X	A	D	D	B	B	C	G		C	C	C	G				
	390pF (391)	E		S	X	B	D	D	B	B	C			C	C	C	G				
	470pF (471)	E		S	X	B	D		B	C	C			C	C	C	G				
	560pF (561)	E		S		B	D		B	C	D			C	C	C					
	680pF (681)	E		S		B	D		B	C	D			C	C	C					
	820pF (821)	E		S		B	D		B	C	G			C	C	C					
	1,000pF (102)	E		S		B	D		B	C	G			C	D	D					
	1,200pF (122)								B	C	G			C	D	D					
	1,500pF (152)								B	D	G			C	D	D					
1,800pF (182)								B	D	G			C	D	D						
2,200pF (222)								B	D	G			C	D							
2,700pF (272)								B	D				C	D							
3,300pF (332)								B	D				C	D							
3,900pF (392)								B	D				C	D							
4,700pF (472)								B	D				C								
5,600pF (562)													C								
6,800pF (682)													C								
8,200pF (822)													C								
0.010μF (103)													C								
0.012μF (123)													D								
0.015μF (153)													D								

- The letter in cell is expressed the symbol of product thickness.
- For more information about products with special capacitance or other data, please contact WTC local representative.

Soft Termination Capacitors SH / SG Series

■ CAPACITANCE RANGE (SH Series)

X7R Dielectric 10V To 250V

DIELECTRIC		X7R																										
SIZE		0402				0603					0805				1206					1210				1812				
RATED VOLTAGE (VDC)		10 16	25	50	100	10 16	25	50	100	200 250	10 16 25	50	100	200 250	10 16	25	50	100	200 250	10 16 25	50	100	200 250	10 16 25	50	100	200 250	
Capacitance	100pF (101)	E	E	E	E	S	S	S	S	X	D	D	D	D														
	120pF (121)	E	E	E	E	S	S	S	S	X	D	D	D	D														
	150pF (151)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	180pF (181)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	220pF (221)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	270pF (271)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	330pF (331)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	390pF (391)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	470pF (471)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	560pF (561)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	680pF (681)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	820pF (821)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D								
	1,000pF (102)	E	E	E	E	S	S	S	S	X	D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	1,200pF (122)	E	E	E		S	S	S	S	X	D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	1,500pF (152)	E	E	E		S	S	S	S	X	D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	1,800pF (182)	E	E	E		S	S	S	S	X	D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	2,200pF (222)	E	E	E		S	S	S	S	X	D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	2,700pF (272)	E	E	E		S	S	S	S		D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	3,300pF (332)	E	E	E		S	S	S	S		D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	3,900pF (392)	E	E	E		S	S	S	S		D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	4,700pF (472)	E	E	E		S	S	S	S		D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	5,600pF (562)	E	E	E		S	S	S	S		D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	6,800pF (682)	E	E	E		S	S	S	S		D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	8,200pF (822)	E	E	E		S	S	S	S		D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	0.010µF (103)	E	E	E		S	S	S	S		D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	0.012µF (123)	E	E			S	S	S			D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	0.015µF (153)	E	E			S	S	S			D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	0.018µF (183)	E	E			S	S	S			D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	0.022µF (223)	E	E			S	S	S			D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	0.027µF (273)	E	E			S	S	S			D	D	D	D	D	D	D	D	D	D	C	C	C	C	D	D	D	D
	0.033µF (333)	E	E			S	S	X			D	D	D	D	D	D	D	D	D	D	G	C	C	C	D	D	D	D
	0.039µF (393)	E	E			S	S	X			D	D	D	D	D	D	D	D	D	D	G	C	C	C	D	D	D	D
	0.047µF (473)	E	E			S	S	X			D	D	D	D	D	D	D	D	D	D	G	C	C	C	D	D	D	D
	0.056µF (563)	E				S	S	X			D	D	D	D	D	D	D	D	D	D	G	C	C	C	D	D	D	D
	0.068µF (683)	E				S	S	X			D	D	D	D	D	D	D	D	D	D	G	C	C	C	G	D	D	D
	0.082µF (823)	E				S	S	X			D	D	D	D	D	D	D	D	D	D	G	C	C	C	G	D	D	D
	0.10µF (104)	E				S	S	X			D	D	D	D	D	D	D	D	D	D	G	C	C	C	G	D	D	D
	0.12µF (124)					S	X				D	D									C	C	C	G	D	D	D	D
	0.15µF (154)					S	X				D	D									C	C	C	G	D	D	D	K
	0.18µF (184)					S	X				D	D									C	C	C	G	D	D	D	K
0.22µF (224)					S	X				D	D									C	C	C	G	D	D	D	K	
0.27µF (274)					X	X				I										C	C	D		D	D	D	K	
0.33µF (334)					X	X				I										C	C	D		D	D	D	K	
0.39µF (394)					X	X				I										J	J	P		D	D	D	K	
0.47µF (474)					X	X				I										J	J	P		D	D	K	K	
0.56µF (564)					X					I										J	J	P		D	D	K	M	
0.68µF (684)					X					I										J	J	P		D	D	K	M	
0.82µF (824)										I										J	J	P		D	D	K	M	
1.0µF (105)										I										J	J	P		D	D	K	M	
1.5µF (155)																				J	P						K	
2.2µF (225)																				J	P		G				M	
3.3µF (335)																				P	P		G					
4.7µF (475)																				P	P		G					
10µF (106)																							K					

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative

■ CAPACITANCE RANGE (SH Series)

X7R Dielectric 500V To 3kV

DIELECTRIC		X7R																	
		0805			1206				1210			1808				1812			
SIZE		500	630	1000	500	630	1000	2000	500	630	1000	500 630	1000	2000	3000	500 630	1000	2000	3000
RATED VOLTAGE (VDC)																			
Capacitance	100pF (101)	B	B	B															
	120pF (121)	B	B	B															
	150pF (151)	B	B	B	D	D	D	D				D	D	D	D				
	180pF (181)	B	B	B	D	D	D	D				D	D	D	D				
	220pF (221)	B	B	B	D	D	D	D				D	D	D	D				
	270pF (271)	B	B	B	D	D	D	D				D	D	D	D		D	D	
	330pF (331)	B	B	B	D	D	D	D				D	D	D	K		D	D	
	390pF (391)	B	B	B	D	D	D	D				D	D	D	K		D	D	
	470pF (471)	B	B	B	D	D	D	D				D	D	D	K		D	D	K
	560pF (561)	B	B	B	D	D	D	D				D	D	D	K		D	D	K
	680pF (681)	B	B	B	D	D	D	D				D	D	D	K		D	D	K
	820pF (821)	B	B	B	D	D	D	G				D	D	D	K		D	D	K
	1,000pF (102)	B	B	B	D	D	D	G	D	D	D	D	D	D	K	D	D	D	K
	1,200pF (122)	B	B	B	D	D	D	G	D	D	D	D	D	K	K	D	D	D	K
	1,500pF (152)	B	B	D	D	D	D	G	D	D	D	D	D	K	K	D	D	D	K
	1,800pF (182)	B	B	D	D	D	D	G	D	D	D	D	D	K	K	D	D	D	M
	2,200pF (222)	B	B	D	D	D	D	G	D	D	D	D	D	K		D	D	D	M
	2,700pF (272)	B	B		D	D	D	G	D	D	D	D	D			D	D	D	M
	3,300pF (332)	B	B		D	D	D	G	D	D	D	D	D			D	D	K	M
	3,900pF (392)	B	B		D	D	D		D	D	G	D	D			D	D	K	
	4,700pF (472)	D	D		D	D	D		D	D	G	D	D			D	D	K	
	5,600pF (562)	D	D		D	D	D		D	D	G	K	K			D	D		
	6,800pF (682)	D	D		D	D	D		D	D	G	K	K			D	D		
	8,200pF (822)	D	D		D	D	D		D	D	G	K	K			D	D		
	0.010μF (103)	D	D		D	D	D		D	D	G	K	K			D	D		
	0.012μF (123)	D	D		D	D	G		D	D	G	K				D	K		
	0.015μF (153)	D	D		D	D	G		D	D	G	K				D	K		
	0.018μF (183)	D	D		D	D			D	D	G	K				D			
	0.022μF (223)	D	D		G	G			D	D	G	K				D			
	0.027μF (273)				G	G			G	G		K				D			
	0.033μF (333)				G	G			G	G		K				D			
	0.039μF (393)				G	G			G	G		K				D			
	0.047μF (473)				G	G			G	G		K				D			
	0.056μF (563)				G	G			G	G		K				K			
0.068μF (683)								K	K		K				K				
0.082μF (823)								K	K						K				
0.10μF (104)								K	K						K				
0.12μF (124)															M				
0.15μF (154)															M				
0.18μF (184)															M				
0.22μF (224)															M				
0.27μF (274)																			
0.33μF (334)																			
0.39μF (394)																			
0.47μF (474)																			
0.56μF (564)																			
0.68μF (684)																			
0.82μF (824)																			
1.00μF (105)																			

1. The letter in cell is expressed the symbol of product thickness.
 2. For more information about products with special capacitance or other data, please contact WTC local representative

Soft Termination Capacitors

SH / SG Series

■ CAPACITANCE RANGE (SG Series) NP0 Dielectric

DIELECTRIC		NP0							
SIZE		0603				0805			
RATED VOLTAGE (VDC)		10	16	25	50	10	16	25	50
Capacitance	0.1pF (0R1)								
	0.2pF (0R2)								
	0.3pF (0R3)								
	0.4pF (0R4)								
	0.5pF (0R5)	S	S	S	S	A	A	A	A
	0.6pF (0R6)	S	S	S	S	A	A	A	A
	0.7pF (0R7)	S	S	S	S	A	A	A	A
	0.8pF (0R8)	S	S	S	S	A	A	A	A
	0.9pF (0R9)	S	S	S	S	A	A	A	A
	1.0pF (1R0)	S	S	S	S	A	A	A	A
	1.2pF (1R2)	S	S	S	S	A	A	A	A
	1.5pF (1R5)	S	S	S	S	A	A	A	A
	1.8pF (1R8)	S	S	S	S	A	A	A	A
	2.2pF (2R2)	S	S	S	S	A	A	A	A
	2.7pF (2R7)	S	S	S	S	A	A	A	A
	3.3pF (3R3)	S	S	S	S	A	A	A	A
	3.9pF (3R9)	S	S	S	S	A	A	A	A
	4.7pF (4R7)	S	S	S	S	A	A	A	A
	5.6pF (5R6)	S	S	S	S	A	A	A	A
	6.8pF (6R8)	S	S	S	S	A	A	A	A
	8.2pF (8R2)	S	S	S	S	A	A	A	A
	10pF (100)	S	S	S	S	A	A	A	A
	12pF (120)	S	S	S	S	A	A	A	A
	15pF (150)	S	S	S	S	A	A	A	A
	18pF (180)	S	S	S	S	A	A	A	A
	22pF (220)	S	S	S	S	A	A	A	A
	27pF (270)	S	S	S	S	A	A	A	A
	33pF (330)	S	S	S	S	A	A	A	A
	39pF (390)	S	S	S	S	A	A	A	A
	47pF (470)	S	S	S	S	A	A	A	A
	56pF (560)	S	S	S	S	A	A	A	A
	68pF (680)	S	S	S	S	A	A	A	A
	82pF (820)	S	S	S	S	A	A	A	A
	100pF (101)	S	S	S	S	A	A	A	A
	120pF (121)	S	S	S	S	A	A	A	A
	150pF (151)	S	S	S	S	A	A	A	A
	180pF (181)	S	S	S	S	A	A	A	A
	220pF (221)	S	S	S	S	A	A	A	A
	270pF (271)	S	S	S	S	A	A	A	A
	330pF (331)	S	S	S	S	A	A	A	A
390pF (391)	S	S	S	S	B	B	B	B	
470pF (471)	S	S	S	S	B	B	B	B	
560pF (561)	S	S	S	S	B	B	B	B	
680pF (681)	S	S	S	S	B	B	B	B	
820pF (821)	S	S	S	S	B	B	B	B	
1,000pF (102)	S	S	S	S	B	B	B	B	
1,200pF (122)	X	X	X	X	B	B	B	B	
1,500pF (152)	X	X	X	X	B	B	B	B	
1,800pF (182)	X	X	X	X	B	B	B	B	
2,200pF (222)	X	X	X	X	B	B	B	B	
2,700pF (272)					D	D	D	D	
3,300pF (332)					D	D	D	D	
3,900pF (392)					D	D	D	D	
4,700pF (472)					D	D	D	D	
5,600pF (562)					D	D	D	D	
6,800pF (682)					D	D	D	D	
8,200pF (822)					D	D	D	D	
0.010uF (103)					D	D	D	D	
0.012uF (123)									

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

■ CAPACITANCE RANGE (SG Series)

X7R Dielectric

DIELECTRIC		X7R			
SIZE		0603			
RATED VOLTAGE (VDC)		10	16	25	50
Capacitance	100pF (101)	S	S	S	S
	120pF (121)	S	S	S	S
	150pF (151)	S	S	S	S
	180pF (181)	S	S	S	S
	220pF (221)	S	S	S	S
	270pF (271)	S	S	S	S
	330pF (331)	S	S	S	S
	390pF (391)	S	S	S	S
	470pF (471)	S	S	S	S
	560pF (561)	S	S	S	S
	680pF (681)	S	S	S	S
	820pF (821)	S	S	S	S
	1,000pF (102)	S	S	S	S
	1,200pF (122)	S	S	S	S
	1,500pF (152)	S	S	S	S
	1,800pF (182)	S	S	S	S
	2,200pF (222)	S	S	S	S
	2,700pF (272)	S	S	S	S
	3,300pF (332)	S	S	S	S
	3,900pF (392)	S	S	S	S
	4,700pF (472)	S	S	S	S
	5,600pF (562)	S	S	S	S
	6,800pF (682)	S	S	S	S
	8,200pF (822)	S	S	S	S
	0.010μF (103)	S	S	S	S
	0.012μF (123)	S	S	S	S
	0.015μF (153)	S	S	S	S
	0.018μF (183)	S	S	S	S
	0.022μF (223)	S	S	S	S
	0.027μF (273)	S	S	S	S
	0.033μF (333)	S	S	S	X
	0.039μF (393)	S	S	S	X
	0.047μF (473)	S	S	S	X
	0.056μF (563)	S	S	S	X
	0.068μF (683)	S	S	S	X
	0.082μF (823)	S	S	S	X
	0.10μF (104)	S	S	S	X
	0.12μF (124)				
	0.15μF (154)				
	0.18μF (184)				
0.22μF (224)					
0.27μF (274)					
0.33μF (334)					
0.39μF (394)					
0.47μF (474)					
0.56μF (564)					
0.68μF (684)					
0.82μF (824)					
1.0μF (105)					

Y5V Dielectric

DIELECTRIC		Y5V	
SIZE		0603	
RATED VOLTAGE (VDC)		10	16
Capacitance	0.010μF (103)	S	S
	0.015μF (153)	S	S
	0.022μF (223)	S	S
	0.033μF (333)	S	S
	0.047μF (473)	S	S
	0.068μF (683)	S	S
	0.10μF (104)	S	S
	0.15μF (154)	S	S
	0.22μF (224)	S	S
	0.33μF (334)	S	S
	0.47μF (474)	S	S
	0.68μF (684)	S	X
	1.0μF (105)	S	X

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * High voltage in a given case size.
- * Circuit open during product cracking.
- * High stability and reliability.

GENERAL ELECTRICAL DATA




Dielectric	X7R
Size	0805, 1206, 1210, 1812
Capacitance	100pF to 1μF
Capacitance tolerance	K (±10%), M (±20%)
Rated voltage (WVDC)	50V, 100V, 200V, 250V, 500V
DF(Tan δ)	≤2.5%
Insulation resistance at Ur	≥10GΩ or RxC≥500Ω-F whichever is smaller
Dielectric strength	100V: ≥2.5 x WVDC 200V and 250V: ≥2 x WVDC 500V: ≥1.5 x WVDC
Operating temperature	-55 to +125°C
Capacitance characteristic	±15%
Termination	Ni/Sn (lead-free termination)

EXPLANATION OF PART NUMBERS

OP	32	B	103	K	201	C	T
Series	Size (Inch (mm))	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
OP=Open-mode	32=1210 (3225)	B=X7R	103=10x10 ³ =10nF	K=±10%	201=200 VDC	C=Cu/Ni/Sn	T=7" reeled

* Please refer to page 2 "How to order" for more information.

INNER CONSTRUCTION OF OPEN-MODE DESIGN

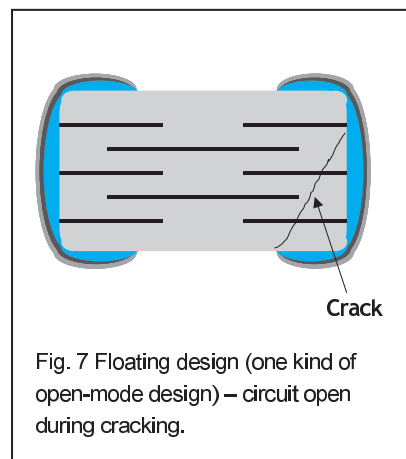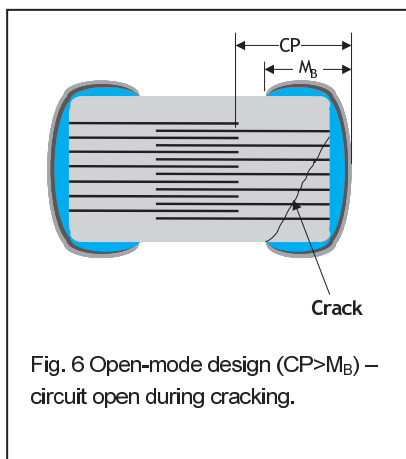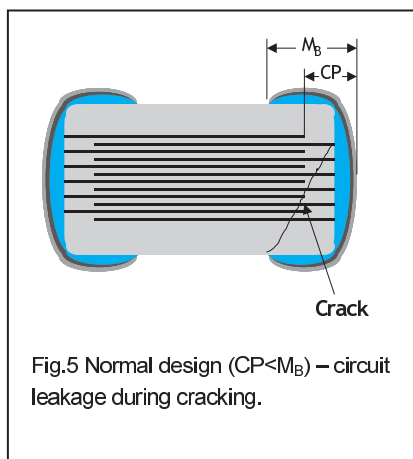

■ CAPACITANCE RANGE

DIELECTRIC		X7R																
		0805				1206					1210				1812			
SIZE		100	200	250	500	50	100	200	250	500	100	200	250	500	100	200	250	500
RATED VOLTAGE (VDC)		100	200	250	500	50	100	200	250	500	100	200	250	500	100	200	250	500
Capacitance	100pF (101)	B	B	B	B													
	120pF (121)	B	B	B	B													
	150pF (151)	B	B	B	B	B	B	D	D	D								
	180pF (181)	B	B	B	B	B	B	D	D	D								
	220pF (221)	B	B	B	B	B	B	D	D	D								
	270pF (271)	B	B	B	B	B	B	D	D	D								
	330pF (331)	B	B	B	B	B	B	D	D	D								
	390pF (391)	B	B	B	B	B	B	D	D	D								
	470pF (471)	B	B	B	B	B	B	D	D	D								
	560pF (561)	B	B	B	B	B	B	D	D	D								
	680pF (681)	B	B	B	B	B	B	D	D	D								
	820pF (821)	B	B	B	B	B	B	D	D	D								
	1,000pF (102)	B	B	B	B	B	B	D	D	D	C	C	C	D	D	D	D	D
	1,200pF (122)	B	B	B	B	B	B	D	D	D	C	C	C	D	D	D	D	D
	1,500pF (152)	B	B	B	B	B	B	D	D	D	C	C	C	D	D	D	D	D
	1,800pF (182)	B	B	B	B	B	B	D	D	D	C	C	C	D	D	D	D	D
	2,200pF (222)	B	B	B	B	B	B	D	D	D	C	C	C	D	D	D	D	D
	2,700pF (272)	B	B	B	B	B	B	D	D	D	C	C	C	D	D	D	D	D
	3,300pF (332)	B	B	B	B	B	B	D	D	D	C	C	C	D	D	D	D	D
	3,900pF (392)	B	B	B	B	B	B	D	D	D	C	C	C	D	D	D	D	D
	4,700pF (472)	B	B	B	D	B	B	D	D	D	C	C	C	D	D	D	D	D
	5,600pF (562)	B	D	D	D	B	B	D	D	D	C	C	C	D	D	D	D	D
	6,800pF (682)	B	D	D	D	B	B	D	D	D	C	C	C	D	D	D	D	D
	8,200pF (822)	B	D	D	D	B	B	D	D	D	C	C	C	D	D	D	D	D
	0.010μF (103)	B	D	D	D	B	B	D	D	D	C	C	C	D	D	D	D	D
	0.012μF (123)	B	D	D		B	B	D	D	D	C	C	C	D	D	D	D	D
	0.015μF (153)	B	D	D		B	B	D	D	D	C	C	C	D	D	D	D	D
	0.018μF (183)	B	D	D		B	B	D	D	D	C	C	C	D	D	D	D	D
	0.022μF (223)	B	D	D		B	B	D	D	G	C	C	C	D	D	D	D	D
	0.027μF (273)	D				B	B	D	D	G	C	C	C	D	D	D	D	D
	0.033μF (333)	D				B	B	G	G	G	C	C	C	G	D	D	D	D
	0.039μF (393)	D				B	B	G	G		C	C	C	G	D	D	D	D
	0.047μF (473)	D				B	B	G	G		C	D	D	G	D	D	D	D
	0.056μF (563)					B	B	G	G		C	D	D	G	D	D	D	K
	0.068μF (683)					B	B	G	G		C	G	G	G	D	D	D	K
	0.082μF (823)					D	D	G	G		C	G	G		D	D	D	K
	0.10μF (104)					D	D	G	G		C	G	G		D	D	D	K
	0.12μF (124)					D	D				C	G	G		D	D	D	
	0.15μF (154)					D	G				D	M	M		D	K	K	
	0.18μF (184)					D	G				D	M	M		D	K	K	
	0.22μF (224)					D	G				D	M	M		D	K	K	
	0.27μF (274)					D					G				D	K	K	
	0.33μF (334)					D					G				D	K	K	
	0.39μF (394)					D					M				D	K	K	
	0.47μF (474)					D					M				K	K	K	
0.56μF (564)										M				K				
0.68μF (684)														K				
0.82μF (824)														K				
1.0μF (105)														K				

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Capacitor Array Capacitors

Y4C3/Y4C2 Series

FEATURES

- * High density mounting due to mounting space saving.
- * Mounting cost saving.
- * Increased throughput.

GENERAL ELECTRICAL DATA

Dielectric	NPO		X7R		Y5V
Size	4x0402	4x0603	4x0402	4x0603	4x0603
Capacitance*	10pF to 270pF	10pF to 470pF	1000pF to 100nF	180pF to 100nF	10nF to 100nF
Capacitance tolerance**	J ($\pm 5\%$), K ($\pm 10\%$)		K ($\pm 10\%$), M ($\pm 20\%$)		Z (-20/+80%)
Rated voltage (WVDC)	25,50V,100V	25, 50V,100V	10V, 16V, 25V, 50V	16V, 25V, 50V	16V, 50V
Q/DF(Tan δ)*	Cap<30pF: Q \geq 400+20C Cap \geq 30pF: Q \geq 1000		Ur=50V, $\leq 2.5\%$ Ur=25V&16V, $\leq 3.5\%$ Ur=10V, $\leq 5.0\%$		Ur=50V, $\leq 5\%$ Ur=16V, $\leq 7\%$
Insulation resistance at Ur	$\geq 10G\Omega$		$\geq 10G\Omega$ or $RxC \geq 500\Omega \times F$ whichever is less		
Operating temperature	-55 to +125°C				-25 to +85°C
Capacitance characteristic	$\pm 30ppm$		$\pm 15\%$		+30/-80%
Termination	Ni/Sn (lead-free termination)				

EXPLANATION OF PART NUMBERS

Y	4C	3	B	103	K	500	C	T
Series	Cap. Nr.	Termination pitch	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
Y=Capacitor array	4C=4xCap	3=0.03" pitch 2=0.02" pitch	B=X7R	103=10x10 ³ =10nF	K= $\pm 10\%$	500=50 VDC	C=Cu/Ni/Sn	T=7" reeled

* Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

SIZE	4 x 0402						4 x 0603					
	DIELECTRIC	NPO	X7R				NPO	X7R			Y5V	
			10	16	25	50		25,50,100	16	25	50	16
RATED VOLTAGE (VDC)	25,50,100	10	16	25	50	25,50,100	16	25	50	16	50	
Capacitance	10pF (100)	T				B						
	15pF (150)	T				B						
	22pF (220)	T				B						
	33pF (330)	T				B						
	47pF (470)	T				B						
	68pF (680)	T				B						
	100pF (101)	T				B						
	150pF (151)	T				B						
	180pF (181)	T				B		B	B			
	220pF (221)	T				B		B	B			
	270pF (271)	T				B		B	B			
	330pF (331)					B		B	B			
	470pF (471)					B		B	B			
	6,80pF (681)							B	B			
	1,000pF (102)		T	T	T	T		B	B			
	1,500pF (152)		T	T	T	T		B	B			
	2,200pF (222)		T	T	T	T		B	B			
	3,300pF (332)		T	T	T	T		B	B			
	4,700pF (472)		T	T	T	T		B	B			
	6,800pF (682)		T	T	T	T		B	B			
	0.010 μ F (103)		T	T	T	T		B	B	B	B	
	0.015 μ F (153)		T	T	T			B	B	B	B	
	0.022 μ F (223)		T	T	T			B	B	B	B	
	0.033 μ F (333)		T	T	T			B			B	
0.047 μ F (473)		T	T	T			B			B		
0.068 μ F (683)		T	T	T			B			B		
0.10 μ F (104)		T	T	T			B			B		

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * Standard size with thin thickness.
- * Small size with high capacitance.
- * Capacitor with lead-free termination (pure Tin).

GENERAL ELECTRICAL DATA

Dielectric	X7R	X5R	Y5V
Size	0402, 0603, 0805, 1206, 1210		
Capacitance range	0.22 μ F to 4.7 μ F	0.22 μ F to 22 μ F	1 μ F to 10 μ F
Capacitance tolerance	K (\pm 10%), M (\pm 20%)		Z (-20/+80%)
Rated voltage (WVDC)	6.3V, 10V, 16V, 25V	6.3V, 10V, 16V, 25V, 50V	10V, 16V, 25V, 50V
DF(Tan δ)*	16V, 10V: \leq 10.0% 6.3V: \leq 15.0%		50V: \leq 7% 25V: \leq 9% 16V, 10V: \leq 12.5%
Insulation resistance at Ur	RxC \geq 100 Ω xF		
Operating temperature	-55 to +125 $^{\circ}$ C	-55 to +85 $^{\circ}$ C	-25 to +85 $^{\circ}$ C
Capacitance characteristic	\pm 15%		+30/-80%
Termination	Ni/Sn (lead-free termination)		

EXPLANATION OF PART NUMBERS

TT	31	X	225	K	100	C	T
Series	Size (Inch (mm))	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
TT=Low profile	31=1206 (3216)	X=X5R	225=22x10 ⁵ =2.2 μ F	K= \pm 10%	100=10 VDC	C=Cu/Ni/Sn	T=7" reeled

* Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

Dielectric		X5R																
Size		0402			0603			0805				1206				1210		
Rated voltage (VDC)		6.3	25	10	16	6.3	10	16	25	6.3	10	16	25	50	10	16	25	
Capacitance	0.22 μ F (224)		L	H	H													
	0.47 μ F (474)	L	L															
	1.0 μ F (105)	L		H	H		T	T	T		T	T	T					
	1.5 μ F (155)						T	T			T	T	T					
	2.2 μ F (225)					T	T	T	T		T	T	T	T				
	3.3 μ F (335)										T	T	T		T			
	4.7 μ F (475)			H		T	T	T	T		T	T	T		T			
	6.8 μ F (685)																	
	10 μ F (106)					T	T	T		J	T		T		T		T	
	22 μ F (226)					T				T		T					T	
	47 μ F (476)									T								

Dielectric		X7R					Y5V								
Size		0805			1206		0805				1206				1210
Rated voltage (VDC)		10	16, 25	10	25	50	10	16	25	50	10	16	25	50	10
Capacitance	1.0 μ F (105)				T					T					
	1.5 μ F (155)														
	2.2 μ F (225)		T			T		T			T	T	T	T	
	3.3 μ F (335)						T								
	4.7 μ F (475)	T			T		T	T			T	T			
	6.8 μ F (685)										T				
	10 μ F (106)			T			T				T				T
	22 μ F (226)														

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

Low Inductance Capacitors

0612 Series

■ FEATURES

- * Standard size with thin thickness.
- * Small size with high capacitance.
- * Capacitor with lead-free termination (pure Tin).
- * MLCC with low ESL performance.

■ GENERAL ELECTRICAL DATA

Dielectric	X7R
Size	0612
Capacitance range	10nF to 150nF
Capacitance tolerance	K (±10%), M (±20%)
Rated voltage (WVDC)	50V
DF(Tan δ)*	≤2.5%
Insulation resistance at Ur	≥10GΩ or RxC≥500ΩxF whichever is less
Operating temperature	-55 to +125°C
Capacitance characteristic	±15%
Termination	Ni/Sn (lead-free termination)
ESL	500pH

■ EXPLANATION OF PART NUMBERS

0612	B	103	K	500	C	T
<u>Size (Inch (mm))</u>	<u>Dielectric</u>	<u>Capacitance</u>	<u>Tolerance</u>	<u>Rated voltage</u>	<u>Termination</u>	<u>Packaging</u>
0612(1632)	B=X7R	103=10x10 ³ =10nF	K=±10%	500=50 VDC	C=Cu/Ni/Sn	T=7" reeled

* Please refer to page 2 "How to order" for more information.

■ CAPACITANCE RANGE

DIELECTRIC		X7R
SIZE		0612
RATED VOLTAGE (VDC)		50
Capacitance	10nF (103)	B
	12nF (123)	B
	15nF (153)	B
	18nF (183)	B
	22nF (223)	B
	27nF (273)	B
	33nF (333)	B
	39nF (393)	B
	47nF (473)	B
	56nF (563)	B
	68nF (683)	B
	82nF (823)	B
	100nF (104)	B
	120nF (124)	B
	150nF (154)	B

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * High voltage in a given case size.
- * High stability and reliability.
- * RoHS compliant.



GENERAL ELECTRICAL DATA

Dielectric	NPO	X7R
Size	1808, 1812, 2211	1808, 1812, 2220, 2211
Capacitance	4pF to 680pF	100pF to 4700pF
Capacitance tolerance	J (±5%), K (±10%)	
Rated voltage (WVAC)	250Vrms	
Q/ DF(Tan δ)	Cap<30pF: Q≥400+20C	DF≤2.5%
Insulation resistance at Ur	≥10GΩ	
Dielectric withstanding strength	1500VAC	
Peak impulse voltage	5000V	
Operating temperature	-55 to +125°C	
Capacitance characteristic	±60ppm	±15%
Termination	Ni/Sn (lead-free termination)	
Certified number	TUV: R500021351,R50118359, R50195920,UL: E250427, E182369	
Test standard	EN 60384-14:2005, IEC 60384-14:2005, EN 60384-14:2005, UL 60950:2000, UL 60384-14	

EXPLANATION OF PART NUMBERS

S2	42	N	100	J	302	L	T
Series S2=X1/Y2	Size (Inch (mm)) 42=1808 (4520)	Dielectric N=NPO	Capacitance 100=10x10 ⁰ =10pF	Tolerance J=±5%	Rated voltage 302=3000 VDC 602=6000 Impulse Voltage	Termination L=Ag/Ni/Sn C=Cu/Ni/Sn	Packaging T=7" reeled

* Please refer to page 2 " How to order" for more information.

CAPACITANCE RANGE

DIELECTRIC		NPO			
SIZE		1808	1812	2211	
RATED VOLTAGE (VDC)		3000	3000	3000	
PEAK IMPULSE VOLTAGE		5000	5000	5000	6000
Capacitance	4pF (4R0)	F		K	K*
	5pF (5R0)	F		K	K*
	10pF (100)	F	D	K	K*
	12pF (120)	F	D	K	K*
	15pF (150)	F	D	K	K*
	18pF (180)	F	D	K	K*
	22pF (220)	F	D	K	K*
	27pF (270)	F	D	K	K*
	33pF (330)	F	D	K	K*
	39pF (390)	G	D	K	K*
	47pF (470)	G	D	K	K*
	56pF (560)	G	D	K	K*
	68pF (680)	G	D	K	M*
	82pF (820)	G	D	K	M*
	100pF (101)	K	D	K	U*
	120pF (121)	K	D	M	
	150pF (151)	K	D	M	
	180pF (181)		D	M	
	220pF (221)		K	M	
	270pF (271)		K	M	

DIELECTRIC		X7R			
SIZE		1808	1812	2211	2220
RATED VOLTAGE (VDC)		3000			
PEAK IMPULSE VOLTAGE		5000			
Capacitance	56pF (560)				
	68pF (680)				
	82pF (820)				
	100pF (101)	G			
	120pF (121)	G			
	150pF (151)	G	G	G	
	180pF (181)	G	G	G	K
	220pF (221)	G	G	G	K
	270pF (271)	K	G	G	K
	330pF (331)	K	G	G	K
	390pF (391)	K	G	G	K
	470pF (471)	K	G	K	K
	560pF (561)	K	G	K	K
	680pF (681)	K	K	K	K
	820pF (821)	K	K	K	K
	1,000pF (102)	K	M	M	K
	1,200pF (122)			M	M
	1,500pF (152)			M	M
	1,800pF (182)			M	M
	2,200pF (222)			M	M

- The letter in cell is expressed the symbol of product thickness.
- The letter in cell with "*" mark is expressed product with Cu/Ni/Sn terminations.
- For more information about products with special capacitance or other data, please contact WTC local representative.

PACKAGING DIMENSION AND QUANTITY (X1/Y2 & X2/Y3 Series)

Size Inch (mm)	L (mm)	W (mm)	MB min(mm)	T (mm)/Symbol	7" Plastic tape	
1808 (4520)	4.50±0.5/-0.3	2.03±0.25	0.26	1.40±0.15	F	2,000
				1.60±0.20	G	1,000
				2.00±0.20	K	1,000
1812 (4532)	4.50±0.5/-0.3	3.20±0.30	0.26	1.60±0.20	G	1,000
				2.00±0.20	K	1,000
				2.50±0.30	M	500
2220 (5750)	5.70±0.40	5.00±0.40	0.30	2.00±0.20	K	1,000
				2.50±0.30	M	500
2211 (5728)	5.70±0.40	2.80±0.30	0.30	1.60±0.20	G	1,000
				2.00±0.20	K	1,000
				2.50±0.30	M	500

Safety Certificated Capacitors X2/Y3 S3 Series



FEATURES

- * High voltage in a given case size.
- * High stability and reliability.
- * RoHS compliant.

GENERAL ELECTRICAL DATA

Dielectric	NPO	X7R
Size	1808, 1812	
Capacitance*	3.9pF to 1000pF	150pF to 5600pF
Capacitance tolerance	J (±5%), K (±10%)	K (±10%), M (±20%)
Rated voltage (WVDC)	2000V, 3000V	
Rated voltage (WVAC)	250Vrms	
Q/ DF(Tan δ)	Cap<30pF: Q≥400+20C	Tan δ≤2.5%
Insulation resistance at Ur	≥10GΩ	
Dielectric withstanding strength	1500VAC	
Peak impulse voltage (X2)	2500V	
Operating temperature	-55 to +125°C	
Capacitance characteristic	±60ppm	±15%
Termination	Ni/Sn (lead-free termination)	
Certified number	TUV: R500021351, R50118359, R50195920, UL: E250427, E182369	
Test standard	EN 60384-14:2005, IEC 60384-14:2005, UL 60950:2000, UL 60384-14	

EXPLANATION OF PART NUMBERS

S3	42	N	100	J	202	L	T
Series	Size (Inch (mm))	Dielectric	Capacitance	Tolerance	Rated voltage	Termination	Packaging
S3=X2/Y3	42=1808 (4520)	N=NPO	100=10x10 ⁰ =10pF	J=±5%	202=2000 VDC	L=Ag/Ni/Sn	T=7" reeled

* Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

DIELECTRIC	NPO		
	SIZE		
	1808	1812	1812
RATED VOLTAGE (VDC)	2000	3000	3000
3.9pF (3R9)		F	
4.7pF (4R7)		F	
5.0pF (5R0)		F	
5.6pF (5R6)		F	
6.8pF (6R8)		F	
8.2pF (8R2)		F	
10pF (100)	F	F	D
12pF (120)	F	F	D
15pF (150)	F	F	D
18pF (180)	F	F	D
22pF (220)	F	F	D
27pF (270)	F	F	D
33pF (330)	F	F	D
39pF (390)	G	G	D
47pF (470)	G	G	D
56pF (560)	G	G	D
68pF (680)	G	G	D
82pF (820)	G	G	D
100pF (101)	K	K	D
120pF (121)	K	K	D
150pF (151)	K	K	D
180pF (181)	K	K	D
220pF (221)	K	K	D
270pF (271)	K	K	D
330pF (331)	K		D
390pF (391)	K		D
470pF (471)	K		D
560pF (561)	K		D
680pF (681)	K		K
820pF (821)	K		K
1,000pF (102)	K		K

DIELECTRIC	X7R			
	SIZE			
	1808	3000	2000	3000
RATED VOLTAGE (VDC)	2000	3000	2000	3000
150pF (151)	G			
180pF (181)	G			
220pF (221)	G			
270pF (271)	G		G	
330pF (331)	G	G	G	
390pF (391)	G	G	G	
470pF (471)	G	G	G	
560pF (561)	G	G	G	
680pF (681)	G	G	G	G
820pF (821)	G	G	G	G
1,000pF (102)	K	K	G	G
1,200pF (122)	K		G	
1,500pF (152)	K		K	
1,800pF (182)	K		K	
2,200pF (222)	K		M	
2,700pF (272)			M	
3,300pF (332)			M	
3,900pF (392)			M	
4,700pF (472)			M	
5,600pF (562)			M	

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors without AEC-Q200 MG Series

FEATURES

- * A wide selection of sizes is available (0402 to 1812).
- * High capacitance in given case size.
- * Capacitor with lead-free termination (pure Tin).
- * High reliability design with severe quality controls.

GENERAL ELECTRICAL DATA

Dielectric	NPO	X7R	X5R
Size	0402, 0603, 0805, 1206, 1210, 1812		
Capacitance range*	0.5pF to 0.033μF	100pF to 2.2μF	0.056μF to 10μF
Capacitance tolerance**	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)	J (±5%), K (±10%), M (±20%)	
Rated voltage (WVDC)	16V, 25V, 50V, 100V	10V, 16V, 25V, 50V, 100V, 200V, 250V	6.3V, 10V, 16V, 25V
Operating temperature	-55 to +125°C		-55 to +85°C
Capacitance characteristic	±30ppm/°C		±15%
Termination	Ni/Sn (lead-free termination)		

EXPLANATION OF PART NUMBERS

MG	31	B	104	K	500	C	T
Series MG= Automotive (without AEC-Q200 certification)	Size (Inch (mm)) 31=1206 (3216)	Dielectric B=X7R	Capacitance 104=10x10 ⁴ =0.1μF	Tolerance K=±10%	Rated voltage 500=50 VDC	Termination C=Cu/Ni/Sn	Packaging T=7" reeled

* Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

X5R Dielectric

Dielectric	X5R																		
	Size		0402				0603				0805				1206				1210
Rated Voltage(VDC)	6.3	10	16	6.3	10	16	25	6.3	10	16	25	6.3	10	16	25	10	16		
Capacitance	0.056μF (563)		N																
	0.068μF (683)		N																
	0.082μF (823)		N																
	0.10μF (104)		N	N															
	0.15μF (154)		N	N															
	0.22μF (224)	N	N	N				X											
	0.27μF (274)	N	N			X	X	X											
	0.33μF (334)	N	N			X	X	X											
	0.39μF (394)	N				X	X	X											
	0.47μF (474)	N				X	X	X											
	0.68μF (684)	N				X	X	X											
	0.82μF (824)	N			X	X	X	X											
	1.0μF (105)				X	X	X	X											
	1.5μF (155)								I	I				J	J	P	K	K	
	2.2μF (225)								I	I	I	I		J	J	P	K	K	
	3.3μF (335)										I	I	P	P	P	P	K	K	
4.7μF (475)										I	I	P	P	P	P	K	K		
6.8μF (685)												P	P						
10μF (106)												P	P						

1. The letter in cell is expressed the symbol of product thickness.

2. For more information about products with special capacitance or other data, please contact WTC local representative.

NP0 Dielectric

Dielectric Size	NP0													
	0402	0603	0805				1206		1210			1812		
Rated Voltage (VDC)	10,16, 25,50, 100	10,16, 25,50, 100	10,16, 25,50	100	200	250	500, 630	10,16, 25,50,	100	10,16	25,50	100	10,16, 25,50	100
0.1pF (0R1)														
0.2pF (0R2)														
0.3pF (0R3)														
0.4pF (0R4)														
0.5pF (0R5)	N	S	A	A	A	A	A							
0.6pF (0R6)	N	S	A	A	A	A	A							
0.7pF (0R7)	N	S	A	A	A	A	A							
0.8pF (0R8)	N	S	A	A	A	A	A							
0.9pF (0R9)	N	S	A	A	A	A	A							
1.0pF (1R0)	N	S	A	A	A	A	A							
1.2pF (1R2)	N	S	A	A	A	A	A							
1.5pF (1R5)	N	S	A	A	A	A	A	B	B					
1.8pF (1R8)	N	S	A	A	A	A	A	B	B					
2.2pF (2R2)	N	S	A	A	A	A	A	B	B					
2.7pF (2R7)	N	S	A	A	A	A	A	B	B					
3.3pF (3R3)	N	S	A	A	A	A	A	B	B					
3.9pF (3R9)	N	S	A	A	A	A	A	B	B					
4.7pF (4R7)	N	S	A	A	A	A	A	B	B					
5.6pF (5R6)	N	S	A	A	A	A	A	B	B					
6.8pF (6R8)	N	S	A	A	A	A	A	B	B					
8.2pF (8R2)	N	S	A	A	A	A	A	B	B					
10pF (100)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
12pF (120)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
15pF (150)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
18pF (180)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
22pF (220)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
27pF (270)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
33pF (330)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
39pF (390)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
47pF (470)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
56pF (560)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
68pF (680)	N	S	A	A	A	A	A	B	B	C	C	C	D	D
82pF (820)	N	S	A	A	A	A	B	B	B	C	C	C	D	D
100pF (101)	N	S	A	A	A	B	B	B	B	C	C	C	D	D
120pF (121)	N	S	A	A	A	B	D	B	B	C	C	C	D	D
150pF (151)	N	S	A	A	B	D	D	B	B	C	C	C	D	D
180pF (181)	N	S	A	A	B	D	D	B	B	C	C	C	D	D
220pF (221)	N	S	A	A	D	D	D	B	B	C	C	C	D	D
270pF (271)		S	A	A	D	D	D	B	B	C	C	C	D	D
330pF (331)		S	A	A	D	D	D	B	B	C	C	C	D	D
390pF (391)		S	B	B	D	D	D	B	B	C	C	C	D	D
470pF (471)		S	B	B	D	D		B	B	C	C	C	D	D
560pF (561)		S	B	B	D	D		B	B	C	C	C	D	D
680pF (681)		S	B	B	D	D		B	B	C	C	C	D	D
820pF (821)		S	B	B	D	D		B	B	C	C	C	D	D
1,000pF (102)		S	B	B	D	D		B	B	C	C	C	D	D
1,200pF (122)			B	B	D	D		B	B	C	C	C	D	D
1,500pF (152)			B	B	D	D		B	B	C	C	C	D	D
1,800pF (182)			B	B	D	D		B	B	C	C	C	D	D
2,200pF (222)			B	B	D	D		B	B	C	C	C	D	D
2,700pF (272)			D	D				B	B	C	C	C	D	D
3,300pF (332)			D					B	B	C	C	C	D	D
3,900pF (392)			D					B	B	C	C	C	D	D
4,700pF (472)			D					B	B	C	C	C	D	D
5,600pF (562)			D					B	B	C	C	C	D	D
6,800pF (682)			D					C		C	C	C	D	D
8,200pF (822)			D					D		C	C	C	D	D
0.010uF (103)			D					D		C	C	C	D	D
0.012uF (123)										C	D	D	D	D
0.015uF (153)										C	D	D	D	D
0.018uF (183)													D	D
0.022uF (223)													D	D
0.027uF (273)													D	D
0.033uF (333)													D	D

1. The letter in cell is expressed the symbol of product thickness.
2. The letter in cell with "A" mark is expressed product with Ag/Ni/Sn terminations.
3. For more information about products with special capacitance or other data, please contact WTC local representative.

Automotive Capacitors without AEC-Q200 MG Series

X7R Dielectric

Dielectric		X7R																											
Size		0402			0603			0805				1206				1210				1812									
Rated Voltage (VDC)		10, 16	25	50	6.3, 10, 16	25	50	100	10, 16	25	50	100	200, 250	10, 16	25	50	100	200, 250	10, 16	25	50	100	200, 250	10, 16, 25	50	100	200, 250		
Capacitance	100pF (101)	N	N	N	S	S	S	S	B	B	B	B	B																
	120pF (121)	N	N	N	S	S	S	S	B	B	B	B	B																
	150pF (151)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	180pF (181)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	220pF (221)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	270pF (271)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	330pF (331)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	390pF (391)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	470pF (471)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	560pF (561)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	680pF (681)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	820pF (821)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B										
	1,000pF (102)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	1,200pF (122)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	1,500pF (152)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	1,800pF (182)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	2,200pF (222)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	2,700pF (272)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	3,300pF (332)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	3,900pF (392)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	4,700pF (472)	N	N	N	S	S	S	S	B	B	B	B	B	B	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	5,600pF (562)	N	N	N	S	S	S	S	B	B	B	B	B	D	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	6,800pF (682)	N	N	N	S	S	S	S	B	B	B	B	B	D	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	8,200pF (822)	N	N	N	S	S	S	S	B	B	B	B	B	D	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	0.010uF (103)	N	N	N	S	S	S	S	B	B	B	B	B	D	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	0.012uF (123)	N	N		S	S	S		B	B	B	B	B	D	B	B	B	B	B	C	C	C	C	C	C	D	D	D	D
	0.015uF (153)	N	N		S	S	S		B	B	B	B	B	D	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D
	0.018uF (183)	N	N		S	S	S		B	B	B	B	B	D	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D
	0.022uF (223)	N	N		S	S	S		B	B	B	B	B	D	B	B	B	B	C	C	C	C	C	C	C	D	D	D	D
	0.027uF (273)	N	N		S	S	S		B	B	B	B	D		B	B	B	B	C	C	C	C	C	C	C	D	D	D	D
	0.033uF (333)	N	N		S	S	X		B	B	B	B	D		B	B	B	B	G	C	C	C	C	C	C	D	D	D	D
	0.039uF (393)	N	N		S	S	X		B	B	B	B	D		B	B	B	B	G	C	C	C	C	C	C	D	D	D	D
	0.047uF (473)	N	N		S	S	X		B	B	B	B	D		B	B	B	B	G	C	C	C	C	C	D	D	D	D	D
	0.056uF (563)	N			S	S	X		B	B	B	B	D		B	B	B	B	G	C	C	C	C	C	D	D	D	D	D
	0.068uF (683)	N			S	S	X		B	B	B	B	D		B	B	B	B	G	C	C	C	C	C	G	D	D	D	D
	0.082uF (823)	N			S	S	X		B	B	B	B	D		B	B	B	D	G	C	C	C	C	C	G	D	D	D	D
0.10uF (104)	N	N		S	S	X		B	B	B	B	D		B	B	B	D	G	C	C	C	C	C	G	D	D	D	D	
0.12uF (124)				S	X			D	D	D				B	B	B	D		C	C	C	C	C	G	D	D	D	D	
0.15uF (154)				S	X			D	D	D				C	C	C	G		C	C	C	D	M	D	D	D	D	K	
0.18uF (184)				S	X			D	D	D				C	C	C	G		C	C	C	D	M	D	D	D	D	K	
0.22uF (224)				S	X			D	D	D				C	C	C	G		C	C	C	D	M	D	D	D	D	K	
0.27uF (274)				X				D	D					C	C	D			C	C	C	G	M	D	D	D	D	K	
0.33uF (334)				X				D	D					C	C	D			C	C	D	G	M	D	D	D	D	K	
0.39uF (394)				X				D	D					C	J	P			C	C	D	M	M	D	D	D	D	K	
0.47uF (474)				X				D	D					J	J	P			C	C	D	M	M	D	D	K	K	K	
0.56uF (564)								D	D					J	J	P			D	D	D	M		D	D	K			
0.68uF (684)								D	D					J	J	P			D	D	D	K		D	K	K			
0.82uF (824)								D	D					J	J	P			D	D	D	K		D	K	K			
1.0uF (105)								D	D					J	J	P			D	D	D	K		D	K	K			
1.5uF (155)														J	P				K	G							K		
2.2uF (225)														J	P				K	G							M		

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

FEATURES

- * High density mounting due to mounting space saving.
- * Mounting cost saving.
- * Increased throughput.

GENERAL ELECTRICAL DATA

Dielectric	NPO	X7R
Size	4x0402	4x0402
Capacitance range*	10pF to 220pF	1000pF to 0.1μF
Capacitance tolerance**	J (±5%), K (±10%)	K (±10%), M (±20%)
Rated voltage (WVDC)	50V	10V, 16V, 25V
Insulation resistance at Ur	≥10GΩ or RxC≥500ΩxF whichever is less	
Operating temperature	-55 to +125°C	
Capacitance characteristic	±30ppm	±15%
Termination	Ni/Sn (lead-free termination)	

EXPLANATION OF PART NUMBERS

MY	24	N	102	J	500	C	T
Series MY= Automotive Capacitor array (with AEC-Q200 qualification)	Size (Inch (mm)) 24=4x0402	Dielectric N=NP0 (C0G) B=X7R	Capacitance 102=10x10 ² =1000pFuF	Tolerance J=±5%	Rated voltage 500=50 VDC	Termination C=Cu/Ni/Sn	Packaging T=7" reeled G=13" reeled

* Please refer to page 2 "How to order" for more information.

CAPACITANCE RANGE

Size	4 x 0402				
Dielectric	NPO	X7R			
Rated Voltage(VDC)	50	10	16	25	
Capacitance	10pF (100)	T			
	15pF (150)	T			
	22pF (220)	T			
	33pF (330)	T			
	47pF (470)	T			
	68pF (680)	T			
	100pF (101)	T			
	150pF (151)	T			
	180pF (181)	T			
	220pF (221)	T			
	270pF (271)				
	330pF (331)				
	470pF (471)				
	6,80pF (681)				
	1,000pF (102)		T	T	T
	1,500pF (152)		T	T	T
	2,200pF (222)		T	T	T
	3,300pF (332)		T	T	T
	4,700pF (472)		T	T	T
	6,800pF (682)		T	T	T
	0.010μF (103)		T	T	T
	0.015μF (153)		T	T	T
	0.022μF (223)		T	T	T
0.033μF (333)		T	T	T	
0.047μF (473)		T	T	T	
0.068μF (683)		T	T	T	
0.10μF (104)		T	T	T	

1. The letter in cell is expressed the symbol of product thickness.
2. For more information about products with special capacitance or other data, please contact WTC local representative.

Appendix I : Reliability Test Conditions and Requirements

* About Reliability Test Conditions and Requirements, please refer to Walsin MLCC approval sheet for more detail.

No	Item	Test Condition	Requirements																																																																																															
1.	Visual and Mechanical	---	* No remarkable defect. * Dimensions to conform to individual specification sheet.																																																																																															
2.	Capacitance	Class I: NP0 Cap \leq 1000pF 1.0 \pm 0.2Vrms, 1MHz \pm 10% Cap $>$ 1000pF 1.0 \pm 0.2Vrms, 1kHz \pm 10%	* Shall not exceed the limits given in the detailed spec. NP0: Cap \geq 30pF, Q \geq 1000; Cap $<$ 30pF, Q \geq 400+20C X7R,, X6S, X5R: <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.\leq</th> <th colspan="2">Exception of D.F. \leq</th> </tr> </thead> <tbody> <tr> <td>\geq100V</td> <td>\leq2.5%</td> <td>\leq3%</td> <td>1206\geq0.47μF</td> </tr> <tr> <td></td> <td></td> <td>\leq5%</td> <td>0805\geq0.1μF; 0603\geq0.068μF; 1206$>$1μF; TT series</td> </tr> <tr> <td rowspan="3">50V</td> <td rowspan="3">\leq2.5%</td> <td>\leq3%</td> <td>0201(50V); 0603\geq0.047μF; 0805\geq0.18μF; 1206\geq0.47μF</td> </tr> <tr> <td>\leq5%</td> <td>1210\geq4.7μF</td> </tr> <tr> <td>\leq10%</td> <td>0402\geq0.1μF; 0603\geq0.1μF; 0603\geq1μF; 0805\geq1μF; 1206\geq2.2μF; 1210\geq10μF; TT series</td> </tr> <tr> <td>35V</td> <td>\leq3.5%</td> <td>\leq10%</td> <td>0603\geq1μF; 0805\geq2.2μF; 1210\geq10μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">\leq3.5%</td> <td>\leq5%</td> <td>0201\geq0.01μF; 0805\geq1μF; 1210\geq10μF</td> </tr> <tr> <td>\leq7%</td> <td>0603\geq0.33μF; 1206\geq4.7μF</td> </tr> <tr> <td>\leq10%</td> <td>0402\geq0.10μF; 0603\geq0.47μF; 0805\geq2.2μF; 1206\geq6.8μF; 1210\geq22μF; TT series</td> </tr> <tr> <td></td> <td>\leq12.5%</td> <td>0402\geq1μF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">\leq3.5%</td> <td>\leq5%</td> <td>0201\geq0.01μF; 0402\geq0.033μF; 0603\geq0.15μF; 0805\geq0.68μF; 1206\geq2.2μF; 1210\geq4.7μF</td> </tr> <tr> <td>\leq10%</td> <td>0201\geq0.1μF; 0402\geq0.22μF; 0603\geq0.68μF; 0805\geq2.2μF; 1206\geq4.7μF; 1210\geq22μF; TT series</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">\leq5%</td> <td>\leq10%</td> <td>0201\geq0.012μF; 0402\geq0.33μF (0402/X7R\geq0.22μF); 0603\geq0.33μF; 0805\geq2.2μF; 1206\geq2.2μF; 1210\geq22μF; TT series</td> </tr> <tr> <td>\leq15%</td> <td>0201\geq0.1μF; 0402\geq1μF</td> </tr> <tr> <td rowspan="2">6.3V</td> <td rowspan="2">\leq10%</td> <td>\leq15%</td> <td>0201\geq0.1μF; 0402\geq1μF; 0603\geq10μF; 0805\geq4.7μF; 1206\geq47μF; 1210\geq100μF; TT series</td> </tr> <tr> <td>\leq20%</td> <td>0402\geq2.2μF</td> </tr> <tr> <td>4V</td> <td>\leq15%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> X7R/X7E, LD series : 100V: DF \leq 1.4%; \leq 200V:DF \leq 1.0% Y5V: <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F. \leq</th> <th colspan="2">Exception of D.F. \leq</th> </tr> </thead> <tbody> <tr> <td>\geq50V</td> <td>\leq5%</td> <td>\leq7%</td> <td>0603\geq0.1μF; 0805\geq0.47μF; 1206\geq4.7μF; TT series & Cap\geq1μF</td> </tr> <tr> <td>35V</td> <td>\leq7%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">\leq5%</td> <td>\leq7%</td> <td>0402\geq0.047μF; 0603\geq0.1μF; 0805\geq0.33μF; 1206\geq1μF; 1210\geq4.7μF</td> </tr> <tr> <td>\leq9%</td> <td>0402\geq0.068μF; 0603\geq0.47μF; 1206\geq4.7μF; 1210\geq22μF; TT series & Cap\geq1μF</td> </tr> <tr> <td>16V (C$<$1.0μF)</td> <td>\leq7%</td> <td>\leq9%</td> <td>0402\geq0.068μF; 0603\geq0.68μF</td> </tr> <tr> <td></td> <td></td> <td>\leq12.5%</td> <td>0402\geq0.22μF</td> </tr> <tr> <td>16V (C\geq1.0μF)</td> <td>\leq9%</td> <td>\leq12.5%</td> <td>0603\geq2.2μF; 0805\geq3.3μF; 1206\geq10μF; 1210\geq22μF; 1812\geq47μF; TT series & Cap\geq1μF</td> </tr> <tr> <td>10V</td> <td>\leq12.5%</td> <td>\leq20%</td> <td>0402\geq0.47μF</td> </tr> <tr> <td>6.3V</td> <td>\leq20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table>	Rated vol.	D.F. \leq	Exception of D.F. \leq		\geq 100V	\leq 2.5%	\leq 3%	1206 \geq 0.47 μ F			\leq 5%	0805 \geq 0.1 μ F; 0603 \geq 0.068 μ F; 1206 $>$ 1 μ F; TT series	50V	\leq 2.5%	\leq 3%	0201(50V); 0603 \geq 0.047 μ F; 0805 \geq 0.18 μ F; 1206 \geq 0.47 μ F	\leq 5%	1210 \geq 4.7 μ F	\leq 10%	0402 \geq 0.1 μ F; 0603 \geq 0.1 μ F; 0603 \geq 1 μ F; 0805 \geq 1 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F; TT series	35V	\leq 3.5%	\leq 10%	0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1210 \geq 10 μ F	25V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0805 \geq 1 μ F; 1210 \geq 10 μ F	\leq 7%	0603 \geq 0.33 μ F; 1206 \geq 4.7 μ F	\leq 10%	0402 \geq 0.10 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 6.8 μ F; 1210 \geq 22 μ F; TT series		\leq 12.5%	0402 \geq 1 μ F	16V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0402 \geq 0.033 μ F; 0603 \geq 0.15 μ F; 0805 \geq 0.68 μ F; 1206 \geq 2.2 μ F; 1210 \geq 4.7 μ F	\leq 10%	0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 0.68 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F; TT series	10V	\leq 5%	\leq 10%	0201 \geq 0.012 μ F; 0402 \geq 0.33 μ F (0402/X7R \geq 0.22 μ F); 0603 \geq 0.33 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 22 μ F; TT series	\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F	6.3V	\leq 10%	\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F; 0805 \geq 4.7 μ F; 1206 \geq 47 μ F; 1210 \geq 100 μ F; TT series	\leq 20%	0402 \geq 2.2 μ F	4V	\leq 15%	---	---	Rated vol.	D.F. \leq	Exception of D.F. \leq		\geq 50V	\leq 5%	\leq 7%	0603 \geq 0.1 μ F; 0805 \geq 0.47 μ F; 1206 \geq 4.7 μ F; TT series & Cap \geq 1 μ F	35V	\leq 7%	---	---	25V	\leq 5%	\leq 7%	0402 \geq 0.047 μ F; 0603 \geq 0.1 μ F; 0805 \geq 0.33 μ F; 1206 \geq 1 μ F; 1210 \geq 4.7 μ F	\leq 9%	0402 \geq 0.068 μ F; 0603 \geq 0.47 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F; TT series & Cap \geq 1 μ F	16V (C $<$ 1.0 μ F)	\leq 7%	\leq 9%	0402 \geq 0.068 μ F; 0603 \geq 0.68 μ F			\leq 12.5%	0402 \geq 0.22 μ F	16V (C \geq 1.0 μ F)	\leq 9%	\leq 12.5%	0603 \geq 2.2 μ F; 0805 \geq 3.3 μ F; 1206 \geq 10 μ F; 1210 \geq 22 μ F; 1812 \geq 47 μ F; TT series & Cap \geq 1 μ F	10V	\leq 12.5%	\leq 20%	0402 \geq 0.47 μ F	6.3V	\leq 20%	---	---
Rated vol.	D.F. \leq	Exception of D.F. \leq																																																																																																
\geq 100V	\leq 2.5%	\leq 3%	1206 \geq 0.47 μ F																																																																																															
		\leq 5%	0805 \geq 0.1 μ F; 0603 \geq 0.068 μ F; 1206 $>$ 1 μ F; TT series																																																																																															
50V	\leq 2.5%	\leq 3%	0201(50V); 0603 \geq 0.047 μ F; 0805 \geq 0.18 μ F; 1206 \geq 0.47 μ F																																																																																															
		\leq 5%	1210 \geq 4.7 μ F																																																																																															
		\leq 10%	0402 \geq 0.1 μ F; 0603 \geq 0.1 μ F; 0603 \geq 1 μ F; 0805 \geq 1 μ F; 1206 \geq 2.2 μ F; 1210 \geq 10 μ F; TT series																																																																																															
35V	\leq 3.5%	\leq 10%	0603 \geq 1 μ F; 0805 \geq 2.2 μ F; 1210 \geq 10 μ F																																																																																															
25V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0805 \geq 1 μ F; 1210 \geq 10 μ F																																																																																															
		\leq 7%	0603 \geq 0.33 μ F; 1206 \geq 4.7 μ F																																																																																															
		\leq 10%	0402 \geq 0.10 μ F; 0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 6.8 μ F; 1210 \geq 22 μ F; TT series																																																																																															
	\leq 12.5%	0402 \geq 1 μ F																																																																																																
16V	\leq 3.5%	\leq 5%	0201 \geq 0.01 μ F; 0402 \geq 0.033 μ F; 0603 \geq 0.15 μ F; 0805 \geq 0.68 μ F; 1206 \geq 2.2 μ F; 1210 \geq 4.7 μ F																																																																																															
		\leq 10%	0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 0.68 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F; TT series																																																																																															
10V	\leq 5%	\leq 10%	0201 \geq 0.012 μ F; 0402 \geq 0.33 μ F (0402/X7R \geq 0.22 μ F); 0603 \geq 0.33 μ F; 0805 \geq 2.2 μ F; 1206 \geq 2.2 μ F; 1210 \geq 22 μ F; TT series																																																																																															
		\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F																																																																																															
6.3V	\leq 10%	\leq 15%	0201 \geq 0.1 μ F; 0402 \geq 1 μ F; 0603 \geq 10 μ F; 0805 \geq 4.7 μ F; 1206 \geq 47 μ F; 1210 \geq 100 μ F; TT series																																																																																															
		\leq 20%	0402 \geq 2.2 μ F																																																																																															
4V	\leq 15%	---	---																																																																																															
Rated vol.	D.F. \leq	Exception of D.F. \leq																																																																																																
\geq 50V	\leq 5%	\leq 7%	0603 \geq 0.1 μ F; 0805 \geq 0.47 μ F; 1206 \geq 4.7 μ F; TT series & Cap \geq 1 μ F																																																																																															
35V	\leq 7%	---	---																																																																																															
25V	\leq 5%	\leq 7%	0402 \geq 0.047 μ F; 0603 \geq 0.1 μ F; 0805 \geq 0.33 μ F; 1206 \geq 1 μ F; 1210 \geq 4.7 μ F																																																																																															
		\leq 9%	0402 \geq 0.068 μ F; 0603 \geq 0.47 μ F; 1206 \geq 4.7 μ F; 1210 \geq 22 μ F; TT series & Cap \geq 1 μ F																																																																																															
16V (C $<$ 1.0 μ F)	\leq 7%	\leq 9%	0402 \geq 0.068 μ F; 0603 \geq 0.68 μ F																																																																																															
		\leq 12.5%	0402 \geq 0.22 μ F																																																																																															
16V (C \geq 1.0 μ F)	\leq 9%	\leq 12.5%	0603 \geq 2.2 μ F; 0805 \geq 3.3 μ F; 1206 \geq 10 μ F; 1210 \geq 22 μ F; 1812 \geq 47 μ F; TT series & Cap \geq 1 μ F																																																																																															
10V	\leq 12.5%	\leq 20%	0402 \geq 0.47 μ F																																																																																															
6.3V	\leq 20%	---	---																																																																																															
3.	Q/ D.F. (Dissipation Factor)	Class II * : X7R, X7E, X6S, X5R, Y5V Cap \leq 10 μ F, 1.0 \pm 0.2Vrms, 1kHz \pm 10% ** Cap $>$ 10 μ F, 0.5 \pm 0.2Vrms, 120Hz \pm 20% ** Test condition: 0.5 \pm 0.2Vrms, 1kHz \pm 10% X7R: 0805=106(6.3V&10V) X5R: 01R5 \geq 103, 0201 \geq 224 (6.3V,10V), 0402 \geq 475 (6.3V), 0402 \geq 225(10V), 0603=106 (6.3V,10V), TT18X \geq 475(10V), TT15X series X6S:0201 \geq 104 (6.3V),0402 \geq 225 (6.3V), 0603 \geq 106 (6.3V), * Preconditioning for Class II MLCC: Perform a heat treatment at 150 \pm 10 $^{\circ}$ C for 1 hour, then leave in ambient condition for 24 \pm 2 hours before measurement.																																																																																																
4a.	Dielectric Strength	*To apply voltage(\leq 100V) 250%. *Duration: 1 to 5 sec. *Charge & discharge current less than 50mA. *To apply voltage: 200V ~300V & LD series \geq 2 times V DC 500V ~ 999V \geq 1.5 times V DC 1000V ~ 3000V \geq 1.2 times V DC *Cut-off, set at 10mA *TEST= 15 sec. *RAMP=0	*No evidence of damage or flash over during test.																																																																																															
4b.	Dielectric Strength (for X1/Y2 & X2/Y3)	* To apply 1500 VAC voltage. * Duration: 60 sec.	* No evidence of damage or flash over during test.																																																																																															
5.	Insulation Resistance	To apply rated voltage for max. 120 sec.	10G Ω or Rx \geq 500 Ω -F whichever is smaller. Class II (X7R, X7E, X5R, Y5V) <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="6">10GΩ or Rx\geq100 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V:0603\geq1μF;0805\geq1μF;1206\geq2.2μF;1210\geq4.7μF</td> </tr> <tr> <td>35V:0805\geq2.2μF;1210\geq10μF</td> </tr> <tr> <td>25V:0402\geq1μF;0603\geq2.2μF;0805\geq2.2μF;1206\geq10μF;1210\geq10μF</td> </tr> <tr> <td>16V:0201\geq0.1μF;0402\geq0.22μF;0603\geq1μF;0805\geq2.2μF;1206\geq10μF;1210\geq47μF</td> </tr> <tr> <td>10V:0201\geq47nF;0402\geq0.47μF;0603\geq0.47μF; 0805\geq2.2μF; 1206\geq4.7μF;1210\geq47μF</td> </tr> <tr> <td>6.3V : 4V ; TT series</td> <td rowspan="4">Rx\geq50 Ω-F</td> </tr> <tr> <td>All X6S items</td> </tr> <tr> <td>50V: 0402\geq0.1μF; 0603\geq2.2μF; 0805\geq10μF; 1206\geq10μF / 35V: 0603\geq1μF / 25V: 0201\geq0.1μF; 0402\geq0.22μF; 0603\geq10μF; 1206\geq22μF / 16V: 0603\geq10μF / 4V: 0603\geq22μF; 0805\geq47μF</td> </tr> <tr> <td>10V: 0201\geq0.1μF; 0603\geq10μF; 0805\geq47μF / 6.3V: 0201\geq0.1μF; 1206\geq10μF</td> </tr> </tbody> </table> Rated Voltage: 200V ~ 630V To apply rated voltage (500V max.) for 60 sec. Rated Voltage: >630V To apply 500V for 60sec. >10G Ω or 100 Ω -F whichever is smaller. >10G Ω	Rated voltage	Insulation Resistance	100V: X7R	10G Ω or Rx \geq 100 Ω -F whichever is smaller.	50V:0603 \geq 1 μ F;0805 \geq 1 μ F;1206 \geq 2.2 μ F;1210 \geq 4.7 μ F	35V:0805 \geq 2.2 μ F;1210 \geq 10 μ F	25V:0402 \geq 1 μ F;0603 \geq 2.2 μ F;0805 \geq 2.2 μ F;1206 \geq 10 μ F;1210 \geq 10 μ F	16V:0201 \geq 0.1 μ F;0402 \geq 0.22 μ F;0603 \geq 1 μ F;0805 \geq 2.2 μ F;1206 \geq 10 μ F;1210 \geq 47 μ F	10V:0201 \geq 47nF;0402 \geq 0.47 μ F;0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F;1210 \geq 47 μ F	6.3V : 4V ; TT series	Rx \geq 50 Ω -F	All X6S items	50V: 0402 \geq 0.1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 10 μ F; 1206 \geq 10 μ F / 35V: 0603 \geq 1 μ F / 25V: 0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 10 μ F; 1206 \geq 22 μ F / 16V: 0603 \geq 10 μ F / 4V: 0603 \geq 22 μ F; 0805 \geq 47 μ F	10V: 0201 \geq 0.1 μ F; 0603 \geq 10 μ F; 0805 \geq 47 μ F / 6.3V: 0201 \geq 0.1 μ F; 1206 \geq 10 μ F																																																																																	
Rated voltage	Insulation Resistance																																																																																																	
100V: X7R	10G Ω or Rx \geq 100 Ω -F whichever is smaller.																																																																																																	
50V:0603 \geq 1 μ F;0805 \geq 1 μ F;1206 \geq 2.2 μ F;1210 \geq 4.7 μ F																																																																																																		
35V:0805 \geq 2.2 μ F;1210 \geq 10 μ F																																																																																																		
25V:0402 \geq 1 μ F;0603 \geq 2.2 μ F;0805 \geq 2.2 μ F;1206 \geq 10 μ F;1210 \geq 10 μ F																																																																																																		
16V:0201 \geq 0.1 μ F;0402 \geq 0.22 μ F;0603 \geq 1 μ F;0805 \geq 2.2 μ F;1206 \geq 10 μ F;1210 \geq 47 μ F																																																																																																		
10V:0201 \geq 47nF;0402 \geq 0.47 μ F;0603 \geq 0.47 μ F; 0805 \geq 2.2 μ F; 1206 \geq 4.7 μ F;1210 \geq 47 μ F																																																																																																		
6.3V : 4V ; TT series	Rx \geq 50 Ω -F																																																																																																	
All X6S items																																																																																																		
50V: 0402 \geq 0.1 μ F; 0603 \geq 2.2 μ F; 0805 \geq 10 μ F; 1206 \geq 10 μ F / 35V: 0603 \geq 1 μ F / 25V: 0201 \geq 0.1 μ F; 0402 \geq 0.22 μ F; 0603 \geq 10 μ F; 1206 \geq 22 μ F / 16V: 0603 \geq 10 μ F / 4V: 0603 \geq 22 μ F; 0805 \geq 47 μ F																																																																																																		
10V: 0201 \geq 0.1 μ F; 0603 \geq 10 μ F; 0805 \geq 47 μ F / 6.3V: 0201 \geq 0.1 μ F; 1206 \geq 10 μ F																																																																																																		
6.	Temperature Coefficient	With no electrical load. <table border="1"> <thead> <tr> <th>T.C.</th> <th>Operating Temp</th> </tr> </thead> <tbody> <tr> <td>NP0 (C0G)</td> <td>-55~125$^{\circ}$C at 25$^{\circ}$C</td> </tr> <tr> <td>NP0 (C0H)</td> <td>-55~125$^{\circ}$C at 25$^{\circ}$C</td> </tr> <tr> <td>NP0 (C0J)</td> <td>-55~125$^{\circ}$C at 25$^{\circ}$C</td> </tr> <tr> <td>X7R</td> <td>-55~125$^{\circ}$C at 25$^{\circ}$C</td> </tr> <tr> <td>X7E</td> <td>-55~125$^{\circ}$C at 25$^{\circ}$C</td> </tr> <tr> <td>X6S</td> <td>-55~105$^{\circ}$C at 25$^{\circ}$C</td> </tr> <tr> <td>X5R</td> <td>-55~ 85$^{\circ}$C at 25$^{\circ}$C</td> </tr> <tr> <td>Y5V</td> <td>-25~ 85$^{\circ}$C at 20$^{\circ}$C</td> </tr> </tbody> </table>	T.C.	Operating Temp	NP0 (C0G)	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C	NP0 (C0H)	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C	NP0 (C0J)	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C	X7R	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C	X7E	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C	X6S	-55~105 $^{\circ}$ C at 25 $^{\circ}$ C	X5R	-55~ 85 $^{\circ}$ C at 25 $^{\circ}$ C	Y5V	-25~ 85 $^{\circ}$ C at 20 $^{\circ}$ C	<table border="1"> <thead> <tr> <th>T.C.</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>NP0 (C0G)</td> <td>Within \pm30ppm/$^{\circ}$C</td> </tr> <tr> <td>NP0 (C0H)</td> <td>Within \pm60ppm/$^{\circ}$C</td> </tr> <tr> <td>NP0 (C0J)</td> <td>Within \pm120ppm/$^{\circ}$C</td> </tr> <tr> <td>X7R</td> <td>Within \pm15%</td> </tr> <tr> <td>X7E</td> <td>Within \pm4.7%</td> </tr> <tr> <td>X6S</td> <td>Within \pm22%</td> </tr> <tr> <td>X5R</td> <td>Within \pm15%</td> </tr> <tr> <td>Y5V</td> <td>Within +30%/-80%</td> </tr> </tbody> </table>	T.C.	Capacitance Change	NP0 (C0G)	Within \pm 30ppm/ $^{\circ}$ C	NP0 (C0H)	Within \pm 60ppm/ $^{\circ}$ C	NP0 (C0J)	Within \pm 120ppm/ $^{\circ}$ C	X7R	Within \pm 15%	X7E	Within \pm 4.7%	X6S	Within \pm 22%	X5R	Within \pm 15%	Y5V	Within +30%/-80%																																																											
T.C.	Operating Temp																																																																																																	
NP0 (C0G)	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C																																																																																																	
NP0 (C0H)	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C																																																																																																	
NP0 (C0J)	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C																																																																																																	
X7R	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C																																																																																																	
X7E	-55~125 $^{\circ}$ C at 25 $^{\circ}$ C																																																																																																	
X6S	-55~105 $^{\circ}$ C at 25 $^{\circ}$ C																																																																																																	
X5R	-55~ 85 $^{\circ}$ C at 25 $^{\circ}$ C																																																																																																	
Y5V	-25~ 85 $^{\circ}$ C at 20 $^{\circ}$ C																																																																																																	
T.C.	Capacitance Change																																																																																																	
NP0 (C0G)	Within \pm 30ppm/ $^{\circ}$ C																																																																																																	
NP0 (C0H)	Within \pm 60ppm/ $^{\circ}$ C																																																																																																	
NP0 (C0J)	Within \pm 120ppm/ $^{\circ}$ C																																																																																																	
X7R	Within \pm 15%																																																																																																	
X7E	Within \pm 4.7%																																																																																																	
X6S	Within \pm 22%																																																																																																	
X5R	Within \pm 15%																																																																																																	
Y5V	Within +30%/-80%																																																																																																	
7.	Adhesive Strength of Termination	*Pressurizing force: 01005:1N, 0201:2N, 0402 & 0603: 5N >0603: 10N *Test time:10 \pm 1 sec	* No remarkable damage or removal of the terminations.																																																																																															

Appendix I : Reliability Test Conditions and Requirements

No	Item	Test Condition	Requirements																																																																																																				
8.	Vibration Resistance	* Vibration frequency: 10~55 Hz/min. * Total amplitude: 1.5mm * Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable defect. * Dimensions to conform to individual specification sheet.																																																																																																				
9.	Solderability	* Solder temperature: 235±5°C * Dipping time: 2±0.5 sec.	95% min. coverage of all metalized area.																																																																																																				
10.	Bending Test	*The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm / SH series: 5 mm** & 3 mm*** and then the pressure shall be maintained for 5±1 sec. *Measurement to be made after keeping at room temp. for 24±2 hrs. (** Thickness >1.0mm; *** Thickness ≤1.0mm)	* No remarkable damage. * Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X7E, X6S, X5R: within ±12.5% , Y5V: within ±30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)																																																																																																				
11.	Resistance to Soldering Heat	* Solder temperature: 260±5°C * Dipping time: 10±1 sec * Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder. * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X7E, X6S, X5R: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge.																																																																																																				
12.	Temperature Cycle	* Conduct the five cycles according to the temperatures and time. <table border="1" data-bbox="397 746 844 849"> <thead> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Min. operating temp. +0/-3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2-3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. +3/-0</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2-3</td> </tr> </tbody> </table> * Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2-3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2-3	* No remarkable damage. * Cap change: NP0: within ±2.5% or 0.25pF whichever is larger X7R, X7E, X6S, X5R: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements.																																																																																					
Step	Temp. (°C)	Time (min.)																																																																																																					
1	Min. operating temp. +0/-3	30±3																																																																																																					
2	Room temp.	2-3																																																																																																					
3	Max. operating temp. +3/-0	30±3																																																																																																					
4	Room temp.	2-3																																																																																																					
13.	Humidity (Damp Heat) Steady State	* Test temp.: 40±2°C * Humidity: 90~95% RH * Test time: 500+24/-0hrs. *Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.	* No remarkable damage. * Cap change: NP0: within ±5% or 0.5pF whichever is larger X7R, X7E, X6S, X5R: ≥10V**, within ±12.5%; 6.3V within ±25%; TT series, within ±25% **10V:0603≥4.7µF;0402≥1µF;0201≥0.1µF, within ±25%; Y5V: ≥10V, within ±30%; 6.3V, within +30/-40% * Q/D.F. value: NP0: More than 30pF Q≥350, 10pF≤C≤30pF, Q≥275+2.5C, Less than 10pF Q≥200+10C X7R, X6S, X5R: <table border="1" data-bbox="860 1090 1502 1538"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥100V</td> <td rowspan="2">≤3%</td> <td>≤6%</td> <td>1206≥0.47µF</td> </tr> <tr> <td>≤7.5%</td> <td>0805≥0.1µF; 0603≥0.068µF; 1206≥1µF; TT series</td> </tr> <tr> <td rowspan="3">≥50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V);0603≥0.047µF; 0805≥0.18µF; 1206≥0.47µF</td> </tr> <tr> <td>≤10%</td> <td>1210≥4.7µF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.1µF; 0603≥0.1µF; 0603≥1µF; 0805≥1µF; 1206≥2.2µF; 1210≥10µF; TT series</td> </tr> <tr> <td>35V</td> <td>≤5%</td> <td>≤20%</td> <td>0603≥1µF; 0805≥2.2µF; 1210≥10µF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤10%</td> <td>0201≥0.01µF; 0805≥1µF; 1210≥10µF</td> </tr> <tr> <td>≤14%</td> <td>0603≥0.33µF; 1206≥4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.10µF; 0603≥0.47µF; 0805≥2.2µF; 1206≥6.8µF; 1210≥22µF; TT series</td> </tr> <tr> <td>≤20%</td> <td>0402≥1µF</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤10%</td> <td>0603≥0.15µF; 0805≥0.68µF; 1206≥2.2µF; 1210≥4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0201≥0.01µF; 0402≥0.033µF; 0603≥0.68µF; 0805≥2.2µF; 1206≥4.7µF; 1210≥22µF; TT series</td> </tr> <tr> <td rowspan="2">10V</td> <td rowspan="2">≤7.5%</td> <td>≤15%</td> <td>0201≥0.012µF; 0402≥0.33µF (0402/X7R≥0.22µF); 0603≥0.33µF; 0805≥2.2µF; 1206≥2.2µF; 1210≥22µF</td> </tr> <tr> <td>≤20%</td> <td>0201≥0.1µF; 0402≥1µF; TT series</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0201≥0.1µF; 0402≥1µF; 0603≥10µF; 0805≥4.7µF; 1206≥47µF; 1210≥100µF; TT series</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> X7R/X7E, LD series : DF≤3% Y5V: <table border="1" data-bbox="860 1595 1502 1894"> <thead> <tr> <th>Rated vol.</th> <th>D.F.≤</th> <th colspan="2">Exception of D.F.≤</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603≥0.1µF; 0805≥0.47µF; 1206≥4.7µF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402≥0.047µF; 0603≥0.1µF; 0805≥0.33µF; 1206≥1µF; 1210≥4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0402≥0.068µF; 0603≥0.47µF; 1206≥4.7µF; 1210≥22µF; TT series & Cap≥1µF</td> </tr> <tr> <td rowspan="2">16V(C<1.0µF)</td> <td rowspan="2">≤10%</td> <td>≤12.5%</td> <td>0402≥0.068µF; 0603≥0.68µF</td> </tr> <tr> <td>≤20%</td> <td>0402≥0.22µF</td> </tr> <tr> <td rowspan="2">16V(C≥1.0µF)</td> <td rowspan="2">≤12.5%</td> <td>≤20%</td> <td>0603≥2.2µF; 0805≥3.3µF; 1206≥10µF; 1210≥22µF; 1812≥47µF; TT series & Cap≥1µF</td> </tr> <tr> <td>≤30%</td> <td>0402≥0.47µF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402≥0.47µF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> *I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X7E, X6S, X5R, Y5V) <table border="1" data-bbox="860 1940 1502 2135"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="7">1GΩ or RxC≥10 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V:0402≥0.1µF;0603≥1µF;0805≥1µF;1206≥4.7µF;1210≥4.7µF</td> </tr> <tr> <td>35V:0603≥1µF;0805≥2.2µF;1210≥10µF</td> </tr> <tr> <td>25V:0201≥0.1µF; 0402≥0.22µF; 0603≥2.2µF;0805≥2.2µF; 1206≥10µF;1210≥10µF</td> </tr> <tr> <td>16V:0201≥0.1µF;0402≥0.22µF;0603≥1µF;0805≥2.2µF;1206≥10µF;1210≥47µF</td> </tr> <tr> <td>10V:0201≥47nF;0402≥0.47µF;0603≥0.47µF; 0805≥2.2µF;1206≥4.7µF;1210≥47µF</td> </tr> <tr> <td>6.3V ; 4V ; TT series ; All X6S items</td> </tr> </tbody> </table>	Rated vol.	D.F.≤	Exception of D.F.≤		≥100V	≤3%	≤6%	1206≥0.47µF	≤7.5%	0805≥0.1µF; 0603≥0.068µF; 1206≥1µF; TT series	≥50V	≤3%	≤6%	0201(50V);0603≥0.047µF; 0805≥0.18µF; 1206≥0.47µF	≤10%	1210≥4.7µF	≤20%	0402≥0.1µF; 0603≥0.1µF; 0603≥1µF; 0805≥1µF; 1206≥2.2µF; 1210≥10µF; TT series	35V	≤5%	≤20%	0603≥1µF; 0805≥2.2µF; 1210≥10µF	25V	≤5%	≤10%	0201≥0.01µF; 0805≥1µF; 1210≥10µF	≤14%	0603≥0.33µF; 1206≥4.7µF	≤15%	0402≥0.10µF; 0603≥0.47µF; 0805≥2.2µF; 1206≥6.8µF; 1210≥22µF; TT series	≤20%	0402≥1µF	16V	≤5%	≤10%	0603≥0.15µF; 0805≥0.68µF; 1206≥2.2µF; 1210≥4.7µF	≤15%	0201≥0.01µF; 0402≥0.033µF; 0603≥0.68µF; 0805≥2.2µF; 1206≥4.7µF; 1210≥22µF; TT series	10V	≤7.5%	≤15%	0201≥0.012µF; 0402≥0.33µF (0402/X7R≥0.22µF); 0603≥0.33µF; 0805≥2.2µF; 1206≥2.2µF; 1210≥22µF	≤20%	0201≥0.1µF; 0402≥1µF; TT series	6.3V	≤15%	≤30%	0201≥0.1µF; 0402≥1µF; 0603≥10µF; 0805≥4.7µF; 1206≥47µF; 1210≥100µF; TT series	4V	≤20%	---	---	Rated vol.	D.F.≤	Exception of D.F.≤		≥50V	≤7.5%	≤10%	0603≥0.1µF; 0805≥0.47µF; 1206≥4.7µF	35V	≤10%	---	---	25V	≤7.5%	≤10%	0402≥0.047µF; 0603≥0.1µF; 0805≥0.33µF; 1206≥1µF; 1210≥4.7µF	≤15%	0402≥0.068µF; 0603≥0.47µF; 1206≥4.7µF; 1210≥22µF; TT series & Cap≥1µF	16V(C<1.0µF)	≤10%	≤12.5%	0402≥0.068µF; 0603≥0.68µF	≤20%	0402≥0.22µF	16V(C≥1.0µF)	≤12.5%	≤20%	0603≥2.2µF; 0805≥3.3µF; 1206≥10µF; 1210≥22µF; 1812≥47µF; TT series & Cap≥1µF	≤30%	0402≥0.47µF	10V	≤20%	≤30%	0402≥0.47µF	6.3V	≤30%	---	---	Rated voltage	Insulation Resistance	100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.	50V:0402≥0.1µF;0603≥1µF;0805≥1µF;1206≥4.7µF;1210≥4.7µF	35V:0603≥1µF;0805≥2.2µF;1210≥10µF	25V:0201≥0.1µF; 0402≥0.22µF; 0603≥2.2µF;0805≥2.2µF; 1206≥10µF;1210≥10µF	16V:0201≥0.1µF;0402≥0.22µF;0603≥1µF;0805≥2.2µF;1206≥10µF;1210≥47µF	10V:0201≥47nF;0402≥0.47µF;0603≥0.47µF; 0805≥2.2µF;1206≥4.7µF;1210≥47µF	6.3V ; 4V ; TT series ; All X6S items
Rated vol.	D.F.≤	Exception of D.F.≤																																																																																																					
≥100V	≤3%	≤6%	1206≥0.47µF																																																																																																				
		≤7.5%	0805≥0.1µF; 0603≥0.068µF; 1206≥1µF; TT series																																																																																																				
≥50V	≤3%	≤6%	0201(50V);0603≥0.047µF; 0805≥0.18µF; 1206≥0.47µF																																																																																																				
		≤10%	1210≥4.7µF																																																																																																				
		≤20%	0402≥0.1µF; 0603≥0.1µF; 0603≥1µF; 0805≥1µF; 1206≥2.2µF; 1210≥10µF; TT series																																																																																																				
35V	≤5%	≤20%	0603≥1µF; 0805≥2.2µF; 1210≥10µF																																																																																																				
25V	≤5%	≤10%	0201≥0.01µF; 0805≥1µF; 1210≥10µF																																																																																																				
		≤14%	0603≥0.33µF; 1206≥4.7µF																																																																																																				
		≤15%	0402≥0.10µF; 0603≥0.47µF; 0805≥2.2µF; 1206≥6.8µF; 1210≥22µF; TT series																																																																																																				
		≤20%	0402≥1µF																																																																																																				
16V	≤5%	≤10%	0603≥0.15µF; 0805≥0.68µF; 1206≥2.2µF; 1210≥4.7µF																																																																																																				
		≤15%	0201≥0.01µF; 0402≥0.033µF; 0603≥0.68µF; 0805≥2.2µF; 1206≥4.7µF; 1210≥22µF; TT series																																																																																																				
10V	≤7.5%	≤15%	0201≥0.012µF; 0402≥0.33µF (0402/X7R≥0.22µF); 0603≥0.33µF; 0805≥2.2µF; 1206≥2.2µF; 1210≥22µF																																																																																																				
		≤20%	0201≥0.1µF; 0402≥1µF; TT series																																																																																																				
6.3V	≤15%	≤30%	0201≥0.1µF; 0402≥1µF; 0603≥10µF; 0805≥4.7µF; 1206≥47µF; 1210≥100µF; TT series																																																																																																				
4V	≤20%	---	---																																																																																																				
Rated vol.	D.F.≤	Exception of D.F.≤																																																																																																					
≥50V	≤7.5%	≤10%	0603≥0.1µF; 0805≥0.47µF; 1206≥4.7µF																																																																																																				
35V	≤10%	---	---																																																																																																				
25V	≤7.5%	≤10%	0402≥0.047µF; 0603≥0.1µF; 0805≥0.33µF; 1206≥1µF; 1210≥4.7µF																																																																																																				
		≤15%	0402≥0.068µF; 0603≥0.47µF; 1206≥4.7µF; 1210≥22µF; TT series & Cap≥1µF																																																																																																				
16V(C<1.0µF)	≤10%	≤12.5%	0402≥0.068µF; 0603≥0.68µF																																																																																																				
		≤20%	0402≥0.22µF																																																																																																				
16V(C≥1.0µF)	≤12.5%	≤20%	0603≥2.2µF; 0805≥3.3µF; 1206≥10µF; 1210≥22µF; 1812≥47µF; TT series & Cap≥1µF																																																																																																				
		≤30%	0402≥0.47µF																																																																																																				
10V	≤20%	≤30%	0402≥0.47µF																																																																																																				
6.3V	≤30%	---	---																																																																																																				
Rated voltage	Insulation Resistance																																																																																																						
100V: X7R	1GΩ or RxC≥10 Ω-F whichever is smaller.																																																																																																						
50V:0402≥0.1µF;0603≥1µF;0805≥1µF;1206≥4.7µF;1210≥4.7µF																																																																																																							
35V:0603≥1µF;0805≥2.2µF;1210≥10µF																																																																																																							
25V:0201≥0.1µF; 0402≥0.22µF; 0603≥2.2µF;0805≥2.2µF; 1206≥10µF;1210≥10µF																																																																																																							
16V:0201≥0.1µF;0402≥0.22µF;0603≥1µF;0805≥2.2µF;1206≥10µF;1210≥47µF																																																																																																							
10V:0201≥47nF;0402≥0.47µF;0603≥0.47µF; 0805≥2.2µF;1206≥4.7µF;1210≥47µF																																																																																																							
6.3V ; 4V ; TT series ; All X6S items																																																																																																							

Appendix I : Reliability Test Conditions and Requirements

No	Item	Test Condition	Requirements																																																																																																																																																																																																	
14.	Humidity (Damp Heat) Load	<p>* Test temp.: 40±2°C * Humidity: 90~95%RH * Test time: 500+24/-0 hrs. * To apply voltage: Rated voltage. (Max.500V) * Before initial measurement(Class II only): To apply test voltage for 1hr at 40°C and then set for 24±2 hrs at room temp. * Measurement to be made after keeping at room temp. for 24±2 hrs.</p>	<p>* No remarkable damage. Cap change: NP0: ±7.5% or 0.75pF whichever is larger. X7R, X7E, X6S, X5R: ≥10V**, within ±12.5%; 6.3V within ±25%; TT series, within ±25% **10V:0603≥4.7µF;0402≥1µF;0201≥0.1µF, within ±25%; Y5V: ≥10V, within ±30%; 6.3V, within +30/-40% Q/D.F. value: NP0: C≥30pF,Q≥200;C<30pF, Q≥100+10/3C X7R, X6S, X5R:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.s</th> <th colspan="2">Exception of D.F. s</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥100V</td> <td rowspan="2">≤3%</td> <td>≤6%</td> <td>1206±0.47µF</td> </tr> <tr> <td>≤7.5%</td> <td>0805±0.1µF, 0603±0.068µF; 1206>1µF; TT series</td> </tr> <tr> <td rowspan="3">≥50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V),0603±0.047µF; 0805±0.18µF; 1206±0.47µF</td> </tr> <tr> <td>≤10%</td> <td>1210±4.7µF</td> </tr> <tr> <td>≤20%</td> <td>0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series</td> </tr> <tr> <td rowspan="3">35V</td> <td rowspan="3">≤5%</td> <td>≤20%</td> <td>0603±1µF; 0805±2.2µF;1210±10µF</td> </tr> <tr> <td>≤10%</td> <td>0201±0.01µF;0805±1µF; 1210±10µF</td> </tr> <tr> <td>≤14%</td> <td>0603±0.33µF;1206±4.7µF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤15%</td> <td>0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series</td> </tr> <tr> <td>≤20%</td> <td>0402±1µF</td> </tr> <tr> <td>≤10%</td> <td>0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤15%</td> <td>0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF</td> </tr> <tr> <td>≤20%</td> <td>0201±0.1µF ;0402±1µF; TT series</td> </tr> <tr> <td>10V</td> <td>≤7.5%</td> <td>≤15%</td> <td>0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0201±0.1µF ;0402±1µF; TT series</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>X7R/X7E, LD series : DF≤3% Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.s</th> <th colspan="2">Exception of D.F.s</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap±1µF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap±1µF</td> </tr> <tr> <td>16V (C<1.0µF)</td> <td>≤10%</td> <td>≤12.5%</td> <td>0402±0.068µF; 0603±0.68µF</td> </tr> <tr> <td></td> <td></td> <td>≤20%</td> <td>0402±0.22µF</td> </tr> <tr> <td>16V (C≥1.0µF)</td> <td>≤12.5%</td> <td>≤20%</td> <td>0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap±1µF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402±0.47µF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>*I.R.: ≥10V, 500MΩ or 25 Ω-F whichever is smaller. Class II (X7R, X7E, X6S, X5R, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="8">500MΩ or RxC5 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V:0402±0.1µF;0603±1µF;0805±1µF;1206±4.7µF;1210±4.7µF</td> </tr> <tr> <td>35V:0603±1µF;0805±2.2µF;1210±10µF</td> </tr> <tr> <td>25V:0201±0.1µF; 0402±0.22µF; 0603±2.2µF;0805±2.2µF; 1206±10µF;1210±10µF</td> </tr> <tr> <td>16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF</td> </tr> <tr> <td>10V:0201±47nF;0402±0.47µF;0603±0.47µF</td> </tr> <tr> <td>6.3V : 4V ; TT series ; All X6S items</td> </tr> </tbody> </table>	Rated vol.	D.F.s	Exception of D.F. s		≥100V	≤3%	≤6%	1206±0.47µF	≤7.5%	0805±0.1µF, 0603±0.068µF; 1206>1µF; TT series	≥50V	≤3%	≤6%	0201(50V),0603±0.047µF; 0805±0.18µF; 1206±0.47µF	≤10%	1210±4.7µF	≤20%	0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series	35V	≤5%	≤20%	0603±1µF; 0805±2.2µF;1210±10µF	≤10%	0201±0.01µF;0805±1µF; 1210±10µF	≤14%	0603±0.33µF;1206±4.7µF	25V	≤5%	≤15%	0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series	≤20%	0402±1µF	≤10%	0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF	≤15%	0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series	16V	≤5%	≤15%	0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF	≤20%	0201±0.1µF ;0402±1µF; TT series	10V	≤7.5%	≤15%	0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF	6.3V	≤15%	≤30%	0201±0.1µF ;0402±1µF; TT series	4V	≤20%	---	---	Rated vol.	D.F.s	Exception of D.F.s		≥50V	≤7.5%	≤10%	0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap±1µF	35V	≤10%	---	---	25V	≤7.5%	≤10%	0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF	≤15%	0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap±1µF	16V (C<1.0µF)	≤10%	≤12.5%	0402±0.068µF; 0603±0.68µF			≤20%	0402±0.22µF	16V (C≥1.0µF)	≤12.5%	≤20%	0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap±1µF	10V	≤20%	≤30%	0402±0.47µF	6.3V	≤30%	---	---	Rated voltage	Insulation Resistance	100V: X7R	500MΩ or RxC5 Ω-F whichever is smaller.	50V:0402±0.1µF;0603±1µF;0805±1µF;1206±4.7µF;1210±4.7µF	35V:0603±1µF;0805±2.2µF;1210±10µF	25V:0201±0.1µF; 0402±0.22µF; 0603±2.2µF;0805±2.2µF; 1206±10µF;1210±10µF	16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF	10V:0201±47nF;0402±0.47µF;0603±0.47µF	6.3V : 4V ; TT series ; All X6S items																																																																																											
Rated vol.	D.F.s	Exception of D.F. s																																																																																																																																																																																																		
≥100V	≤3%	≤6%	1206±0.47µF																																																																																																																																																																																																	
		≤7.5%	0805±0.1µF, 0603±0.068µF; 1206>1µF; TT series																																																																																																																																																																																																	
≥50V	≤3%	≤6%	0201(50V),0603±0.047µF; 0805±0.18µF; 1206±0.47µF																																																																																																																																																																																																	
		≤10%	1210±4.7µF																																																																																																																																																																																																	
		≤20%	0402±0.1µF;0603±1µF; 0805±1µF;1206±2.2µF; 1210±10µF; TT series																																																																																																																																																																																																	
35V	≤5%	≤20%	0603±1µF; 0805±2.2µF;1210±10µF																																																																																																																																																																																																	
		≤10%	0201±0.01µF;0805±1µF; 1210±10µF																																																																																																																																																																																																	
		≤14%	0603±0.33µF;1206±4.7µF																																																																																																																																																																																																	
25V	≤5%	≤15%	0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series																																																																																																																																																																																																	
		≤20%	0402±1µF																																																																																																																																																																																																	
		≤10%	0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF																																																																																																																																																																																																	
		≤15%	0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series																																																																																																																																																																																																	
16V	≤5%	≤15%	0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF																																																																																																																																																																																																	
		≤20%	0201±0.1µF ;0402±1µF; TT series																																																																																																																																																																																																	
10V	≤7.5%	≤15%	0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF																																																																																																																																																																																																	
6.3V	≤15%	≤30%	0201±0.1µF ;0402±1µF; TT series																																																																																																																																																																																																	
4V	≤20%	---	---																																																																																																																																																																																																	
Rated vol.	D.F.s	Exception of D.F.s																																																																																																																																																																																																		
≥50V	≤7.5%	≤10%	0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap±1µF																																																																																																																																																																																																	
35V	≤10%	---	---																																																																																																																																																																																																	
25V	≤7.5%	≤10%	0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF																																																																																																																																																																																																	
		≤15%	0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap±1µF																																																																																																																																																																																																	
16V (C<1.0µF)	≤10%	≤12.5%	0402±0.068µF; 0603±0.68µF																																																																																																																																																																																																	
		≤20%	0402±0.22µF																																																																																																																																																																																																	
16V (C≥1.0µF)	≤12.5%	≤20%	0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap±1µF																																																																																																																																																																																																	
10V	≤20%	≤30%	0402±0.47µF																																																																																																																																																																																																	
6.3V	≤30%	---	---																																																																																																																																																																																																	
Rated voltage	Insulation Resistance																																																																																																																																																																																																			
100V: X7R	500MΩ or RxC5 Ω-F whichever is smaller.																																																																																																																																																																																																			
50V:0402±0.1µF;0603±1µF;0805±1µF;1206±4.7µF;1210±4.7µF																																																																																																																																																																																																				
35V:0603±1µF;0805±2.2µF;1210±10µF																																																																																																																																																																																																				
25V:0201±0.1µF; 0402±0.22µF; 0603±2.2µF;0805±2.2µF; 1206±10µF;1210±10µF																																																																																																																																																																																																				
16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF																																																																																																																																																																																																				
10V:0201±47nF;0402±0.47µF;0603±0.47µF																																																																																																																																																																																																				
6.3V : 4V ; TT series ; All X6S items																																																																																																																																																																																																				
15.		High Temperature Load (Endurance)	<p>*Test temp.: NP0, X7R/X7E: 125±3°C X6S: 105±3°C X5R, Y5V: 85±3°C *Test time: 1000+24/-0 hrs. *To apply voltage: (1) 6.3V or C≥10µF or TT series: 150% of rated voltage. (2) 10V≤Ur<500V: 200% of rated voltage. (3) 500V: 150% of rated voltage. (4) Ur≥630V: 120% of rated voltage. (5) 100% of rated voltage for below range.</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated voltage</th> <th>Capacitance range</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td rowspan="2">X7R/ X6S/ X5R</td> <td>≤10V</td> <td>C≥0.1µF</td> </tr> <tr> <td>6.3V,10V,25V</td> <td>C≥1.0µF</td> </tr> <tr> <td rowspan="2">0402</td> <td rowspan="2">X7R/ X6S/ X5R</td> <td>4V</td> <td>C≥22µF</td> </tr> <tr> <td>6.3V,10V</td> <td>C≥4.7µF</td> </tr> <tr> <td rowspan="2">0603</td> <td rowspan="2">X7R/ X6S/ X5R</td> <td>25V,35V</td> <td>C≥1.0µF</td> </tr> <tr> <td>4V</td> <td>C≥47µF</td> </tr> <tr> <td rowspan="2">0805</td> <td rowspan="2">X7R/ X6S/ X5R</td> <td>6.3V</td> <td>C≥22µF</td> </tr> <tr> <td>10V~50V</td> <td>C≥10µF</td> </tr> <tr> <td rowspan="2">1206</td> <td rowspan="2">NP0</td> <td>6.3V</td> <td>C≥47µF</td> </tr> <tr> <td>3000V</td> <td>C≥1.5pF</td> </tr> <tr> <td>1210</td> <td>X5R/X7R/X6S</td> <td>16V</td> <td>C≥47µF</td> </tr> <tr> <td>TT18</td> <td>Y5V</td> <td>6.3V,10V</td> <td>C≥2.2µF</td> </tr> <tr> <td>TT21</td> <td>Y5V</td> <td>6.3V</td> <td>C≥10µF</td> </tr> <tr> <td>TT31</td> <td>Y5V</td> <td>6.3V</td> <td>C≥22µF</td> </tr> </tbody> </table> <p>**1WV items must follow de-rating conditions (6)150% of rated voltage for below range.</p> <table border="1"> <thead> <tr> <th>Size</th> <th>Dielectric</th> <th>Rated voltage</th> <th>Capacitance</th> </tr> </thead> <tbody> <tr> <td rowspan="2">0201</td> <td rowspan="2">X5R/X7R/X6S</td> <td>16V/25V</td> <td>C≥0.1µF</td> </tr> <tr> <td>50V</td> <td>C≥0.1µF</td> </tr> <tr> <td rowspan="2">0402</td> <td rowspan="2">X5R/X7R/X6S</td> <td>10~25V</td> <td>C≥0.22µF</td> </tr> <tr> <td>Y5V</td> <td>C≥0.47µF</td> </tr> <tr> <td rowspan="2">0603</td> <td rowspan="2">X7R</td> <td>50V</td> <td>C≥0.1µF</td> </tr> <tr> <td>X5R/X7R/ Y5V</td> <td>10~50V</td> <td>C≥1.0µF</td> </tr> <tr> <td rowspan="2">0805</td> <td rowspan="2">X5R/X7R/X6S</td> <td>10~50V</td> <td>C≥4.7µF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥2.2µF</td> </tr> <tr> <td rowspan="2">1206</td> <td rowspan="2">X5R/X7R/X6S</td> <td>100V</td> <td>C≥0.47µF</td> </tr> <tr> <td>Y5V</td> <td>16V</td> <td>C≥4.7µF</td> </tr> <tr> <td>2220</td> <td>X7R</td> <td>100V</td> <td>C≥6.8µF</td> </tr> </tbody> </table> <p>*Before initial measurement (Class II only): To apply test voltage for 1hr at test temp. and then set for 24±2 hrs at room temp. *Measurement to be made after keeping at room temp. for 24±2 hrs</p>	Size	Dielectric	Rated voltage	Capacitance range	0201	X7R/ X6S/ X5R	≤10V	C≥0.1µF	6.3V,10V,25V	C≥1.0µF	0402	X7R/ X6S/ X5R	4V	C≥22µF	6.3V,10V	C≥4.7µF	0603	X7R/ X6S/ X5R	25V,35V	C≥1.0µF	4V	C≥47µF	0805	X7R/ X6S/ X5R	6.3V	C≥22µF	10V~50V	C≥10µF	1206	NP0	6.3V	C≥47µF	3000V	C≥1.5pF	1210	X5R/X7R/X6S	16V	C≥47µF	TT18	Y5V	6.3V,10V	C≥2.2µF	TT21	Y5V	6.3V	C≥10µF	TT31	Y5V	6.3V	C≥22µF	Size	Dielectric	Rated voltage	Capacitance	0201	X5R/X7R/X6S	16V/25V	C≥0.1µF	50V	C≥0.1µF	0402	X5R/X7R/X6S	10~25V	C≥0.22µF	Y5V	C≥0.47µF	0603	X7R	50V	C≥0.1µF	X5R/X7R/ Y5V	10~50V	C≥1.0µF	0805	X5R/X7R/X6S	10~50V	C≥4.7µF	Y5V	16V	C≥2.2µF	1206	X5R/X7R/X6S	100V	C≥0.47µF	Y5V	16V	C≥4.7µF	2220	X7R	100V	C≥6.8µF	<p>* No remarkable damage. Cap change: NP0: ±3.0% or ±0.3pF whichever is larger X7R, X7E, X6S, X5R: ≥10V**, within ±12.5%;6.3V within ±25%; TT series, within ±25% **10V:0603≥4.7µF;0402≥1µF;0201≥0.1µF, within ±25%; Y5V: ≥10V, within ±30%; 6.3V, within +30/-40% Q/D.F. value: NP0: More than 30pF, Q≥350; 10pF≤C<30pF, Q≥275+2.5C; Less than 10pF, Q≥200+10C X7R, X6S, X5R:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.s</th> <th colspan="2">Exception of D.F. s</th> </tr> </thead> <tbody> <tr> <td rowspan="2">≥100V</td> <td rowspan="2">≤3%</td> <td>≤6%</td> <td>1206±0.47µF</td> </tr> <tr> <td>≤7.5%</td> <td>0805±0.1µF, 0603±0.068µF; 1206>1µF; TT series</td> </tr> <tr> <td rowspan="3">≥50V</td> <td rowspan="3">≤3%</td> <td>≤6%</td> <td>0201(50V),0603±0.047µF; 0805±0.18µF; 1206±0.47µF</td> </tr> <tr> <td>≤10%</td> <td>1210±4.7µF</td> </tr> <tr> <td>≤20%</td> <td>0402±0.1µF;0603±0.47µF; 0805±1µF; 1206±2.2µF; 1210±10µF; TT series</td> </tr> <tr> <td rowspan="3">35V</td> <td rowspan="3">≤5%</td> <td>≤20%</td> <td>0603±1µF; 0805±2.2µF;1210±10µF</td> </tr> <tr> <td>≤10%</td> <td>0201±0.01µF;0805±1µF; 1210±10µF</td> </tr> <tr> <td>≤14%</td> <td>0603±0.33µF;1206±4.7µF</td> </tr> <tr> <td rowspan="4">25V</td> <td rowspan="4">≤5%</td> <td>≤15%</td> <td>0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series</td> </tr> <tr> <td>≤20%</td> <td>0402±1µF</td> </tr> <tr> <td>≤10%</td> <td>0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series</td> </tr> <tr> <td rowspan="2">16V</td> <td rowspan="2">≤5%</td> <td>≤15%</td> <td>0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF; TT series</td> </tr> <tr> <td>≤20%</td> <td>0201±0.1µF ;0402±1µF; TT series</td> </tr> <tr> <td>10V</td> <td>≤7.5%</td> <td>≤15%</td> <td>0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF</td> </tr> <tr> <td>6.3V</td> <td>≤15%</td> <td>≤30%</td> <td>0201±0.1µF ;0402±1µF; TT series</td> </tr> <tr> <td>4V</td> <td>≤20%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>X7R/X7E, LD series : DF≤3% Y5V:</p> <table border="1"> <thead> <tr> <th>Rated vol.</th> <th>D.F.s</th> <th colspan="2">Exception of D.F.s</th> </tr> </thead> <tbody> <tr> <td>≥50V</td> <td>≤7.5%</td> <td>≤10%</td> <td>0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap±1µF</td> </tr> <tr> <td>35V</td> <td>≤10%</td> <td>---</td> <td>---</td> </tr> <tr> <td rowspan="2">25V</td> <td rowspan="2">≤7.5%</td> <td>≤10%</td> <td>0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF</td> </tr> <tr> <td>≤15%</td> <td>0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap±1µF</td> </tr> <tr> <td>16V(C<1.0µF)</td> <td>≤10%</td> <td>≤12.5%</td> <td>0402±0.068µF; 0603±0.68µF</td> </tr> <tr> <td></td> <td></td> <td>≤20%</td> <td>0402±0.22µF</td> </tr> <tr> <td>16V(C≥1.0µF)</td> <td>≤12.5%</td> <td>≤20%</td> <td>0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap±1µF</td> </tr> <tr> <td>10V</td> <td>≤20%</td> <td>≤30%</td> <td>0402±0.47µF</td> </tr> <tr> <td>6.3V</td> <td>≤30%</td> <td>---</td> <td>---</td> </tr> </tbody> </table> <p>*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X7E, X6S, X5R, Y5V)</p> <table border="1"> <thead> <tr> <th>Rated voltage</th> <th>Insulation Resistance</th> </tr> </thead> <tbody> <tr> <td>100V: X7R</td> <td rowspan="8">1GΩ or RxC10 Ω-F whichever is smaller.</td> </tr> <tr> <td>50V:0402±0.1µF;0603±1µF;0805±1µF;1206±4.7µF;1210±4.7µF</td> </tr> <tr> <td>35V:0603±1µF;0805±2.2µF;1210±10µF</td> </tr> <tr> <td>25V:0201±0.1µF; 0402±0.22µF; 0603±2.2µF;0805±2.2µF; 1206±10µF;1210±10µF</td> </tr> <tr> <td>16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF</td> </tr> <tr> <td>10V:0201±47nF;0402±0.47µF;0603±0.47µF;0805±2.2µF;</td> </tr> <tr> <td>6.3V : 4V ; TT series ; All X6S items</td> </tr> </tbody> </table>	Rated vol.	D.F.s	Exception of D.F. s		≥100V	≤3%	≤6%	1206±0.47µF	≤7.5%	0805±0.1µF, 0603±0.068µF; 1206>1µF; TT series	≥50V	≤3%	≤6%	0201(50V),0603±0.047µF; 0805±0.18µF; 1206±0.47µF	≤10%	1210±4.7µF	≤20%	0402±0.1µF;0603±0.47µF; 0805±1µF; 1206±2.2µF; 1210±10µF; TT series	35V	≤5%	≤20%	0603±1µF; 0805±2.2µF;1210±10µF	≤10%	0201±0.01µF;0805±1µF; 1210±10µF	≤14%	0603±0.33µF;1206±4.7µF	25V	≤5%	≤15%	0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series	≤20%	0402±1µF	≤10%	0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF	≤15%	0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series	16V	≤5%	≤15%	0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF; TT series	≤20%	0201±0.1µF ;0402±1µF; TT series	10V	≤7.5%	≤15%	0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF	6.3V	≤15%	≤30%	0201±0.1µF ;0402±1µF; TT series	4V	≤20%	---	---	Rated vol.	D.F.s	Exception of D.F.s		≥50V	≤7.5%	≤10%	0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap±1µF	35V	≤10%	---	---	25V	≤7.5%	≤10%	0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF	≤15%	0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap±1µF	16V(C<1.0µF)	≤10%	≤12.5%	0402±0.068µF; 0603±0.68µF			≤20%	0402±0.22µF	16V(C≥1.0µF)	≤12.5%	≤20%	0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap±1µF	10V	≤20%	≤30%	0402±0.47µF	6.3V	≤30%	---	---	Rated voltage	Insulation Resistance	100V: X7R	1GΩ or RxC10 Ω-F whichever is smaller.	50V:0402±0.1µF;0603±1µF;0805±1µF;1206±4.7µF;1210±4.7µF	35V:0603±1µF;0805±2.2µF;1210±10µF	25V:0201±0.1µF; 0402±0.22µF; 0603±2.2µF;0805±2.2µF; 1206±10µF;1210±10µF	16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF	10V:0201±47nF;0402±0.47µF;0603±0.47µF;0805±2.2µF;
Size	Dielectric	Rated voltage	Capacitance range																																																																																																																																																																																																	
0201	X7R/ X6S/ X5R	≤10V	C≥0.1µF																																																																																																																																																																																																	
		6.3V,10V,25V	C≥1.0µF																																																																																																																																																																																																	
0402	X7R/ X6S/ X5R	4V	C≥22µF																																																																																																																																																																																																	
		6.3V,10V	C≥4.7µF																																																																																																																																																																																																	
0603	X7R/ X6S/ X5R	25V,35V	C≥1.0µF																																																																																																																																																																																																	
		4V	C≥47µF																																																																																																																																																																																																	
0805	X7R/ X6S/ X5R	6.3V	C≥22µF																																																																																																																																																																																																	
		10V~50V	C≥10µF																																																																																																																																																																																																	
1206	NP0	6.3V	C≥47µF																																																																																																																																																																																																	
		3000V	C≥1.5pF																																																																																																																																																																																																	
1210	X5R/X7R/X6S	16V	C≥47µF																																																																																																																																																																																																	
TT18	Y5V	6.3V,10V	C≥2.2µF																																																																																																																																																																																																	
TT21	Y5V	6.3V	C≥10µF																																																																																																																																																																																																	
TT31	Y5V	6.3V	C≥22µF																																																																																																																																																																																																	
Size	Dielectric	Rated voltage	Capacitance																																																																																																																																																																																																	
0201	X5R/X7R/X6S	16V/25V	C≥0.1µF																																																																																																																																																																																																	
		50V	C≥0.1µF																																																																																																																																																																																																	
0402	X5R/X7R/X6S	10~25V	C≥0.22µF																																																																																																																																																																																																	
		Y5V	C≥0.47µF																																																																																																																																																																																																	
0603	X7R	50V	C≥0.1µF																																																																																																																																																																																																	
		X5R/X7R/ Y5V	10~50V	C≥1.0µF																																																																																																																																																																																																
0805	X5R/X7R/X6S	10~50V	C≥4.7µF																																																																																																																																																																																																	
		Y5V	16V	C≥2.2µF																																																																																																																																																																																																
1206	X5R/X7R/X6S	100V	C≥0.47µF																																																																																																																																																																																																	
		Y5V	16V	C≥4.7µF																																																																																																																																																																																																
2220	X7R	100V	C≥6.8µF																																																																																																																																																																																																	
Rated vol.	D.F.s	Exception of D.F. s																																																																																																																																																																																																		
≥100V	≤3%	≤6%	1206±0.47µF																																																																																																																																																																																																	
		≤7.5%	0805±0.1µF, 0603±0.068µF; 1206>1µF; TT series																																																																																																																																																																																																	
≥50V	≤3%	≤6%	0201(50V),0603±0.047µF; 0805±0.18µF; 1206±0.47µF																																																																																																																																																																																																	
		≤10%	1210±4.7µF																																																																																																																																																																																																	
		≤20%	0402±0.1µF;0603±0.47µF; 0805±1µF; 1206±2.2µF; 1210±10µF; TT series																																																																																																																																																																																																	
35V	≤5%	≤20%	0603±1µF; 0805±2.2µF;1210±10µF																																																																																																																																																																																																	
		≤10%	0201±0.01µF;0805±1µF; 1210±10µF																																																																																																																																																																																																	
		≤14%	0603±0.33µF;1206±4.7µF																																																																																																																																																																																																	
25V	≤5%	≤15%	0402±0.10µF;0603±0.47µF;0805±2.2µF;1206±6.8µF;1210±22µF; TT series																																																																																																																																																																																																	
		≤20%	0402±1µF																																																																																																																																																																																																	
		≤10%	0603±0.15µF;0805±0.68µF;1206±2.2µF;1210±4.7µF																																																																																																																																																																																																	
		≤15%	0201±0.01µF;0402±0.033µF;0603±0.68µF;0805±2.2µF; 1206±4.7µF; 1210±22µF; TT series																																																																																																																																																																																																	
16V	≤5%	≤15%	0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF; TT series																																																																																																																																																																																																	
		≤20%	0201±0.1µF ;0402±1µF; TT series																																																																																																																																																																																																	
10V	≤7.5%	≤15%	0201±0.012µF; 0402±0.33µF; 0603±0.33µF;0805±2.2µF;1206±2.2µF; 1210±22µF																																																																																																																																																																																																	
6.3V	≤15%	≤30%	0201±0.1µF ;0402±1µF; TT series																																																																																																																																																																																																	
4V	≤20%	---	---																																																																																																																																																																																																	
Rated vol.	D.F.s	Exception of D.F.s																																																																																																																																																																																																		
≥50V	≤7.5%	≤10%	0603±0.1µF; 0805±0.47µF;1206±4.7µF; TT series & Cap±1µF																																																																																																																																																																																																	
35V	≤10%	---	---																																																																																																																																																																																																	
25V	≤7.5%	≤10%	0402±0.047µF;0603±0.1µF;0805±0.33µF;1206±1µF; 1210±4.7µF																																																																																																																																																																																																	
		≤15%	0402±0.068µF;0603±0.47µF;1206±4.7µF;1210±22µF; TT series & Cap±1µF																																																																																																																																																																																																	
16V(C<1.0µF)	≤10%	≤12.5%	0402±0.068µF; 0603±0.68µF																																																																																																																																																																																																	
		≤20%	0402±0.22µF																																																																																																																																																																																																	
16V(C≥1.0µF)	≤12.5%	≤20%	0603±2.2µF;0805±3.3µF;1206±10µF;1210±22µF;1812±47µF; TT series & Cap±1µF																																																																																																																																																																																																	
10V	≤20%	≤30%	0402±0.47µF																																																																																																																																																																																																	
6.3V	≤30%	---	---																																																																																																																																																																																																	
Rated voltage	Insulation Resistance																																																																																																																																																																																																			
100V: X7R	1GΩ or RxC10 Ω-F whichever is smaller.																																																																																																																																																																																																			
50V:0402±0.1µF;0603±1µF;0805±1µF;1206±4.7µF;1210±4.7µF																																																																																																																																																																																																				
35V:0603±1µF;0805±2.2µF;1210±10µF																																																																																																																																																																																																				
25V:0201±0.1µF; 0402±0.22µF; 0603±2.2µF;0805±2.2µF; 1206±10µF;1210±10µF																																																																																																																																																																																																				
16V:0201±0.1µF;0402±0.22µF;0603±1µF;0805±2.2µF;1206±10µF;1210±47µF																																																																																																																																																																																																				
10V:0201±47nF;0402±0.47µF;0603±0.47µF;0805±2.2µF;																																																																																																																																																																																																				
6.3V : 4V ; TT series ; All X6S items																																																																																																																																																																																																				
16.		ESR	For RF Series only, refer to data sheet.	---																																																																																																																																																																																																

■ Constructions

No.	Name	NP0	NPO/X7R/X6S/X5R/Y5V
①	Ceramic material	BaTiO3 based	
②	Inner electrode	AgPd alloy	Ni
③	Termination	Inner layer	Ag
④		Middle layer	Ni
⑤		Outer layer	Sn

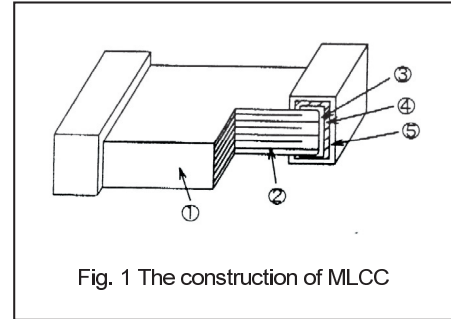


Fig. 1 The construction of MLCC

■ Storage and handling conditions



- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

■ Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N2 within oven are recommended.

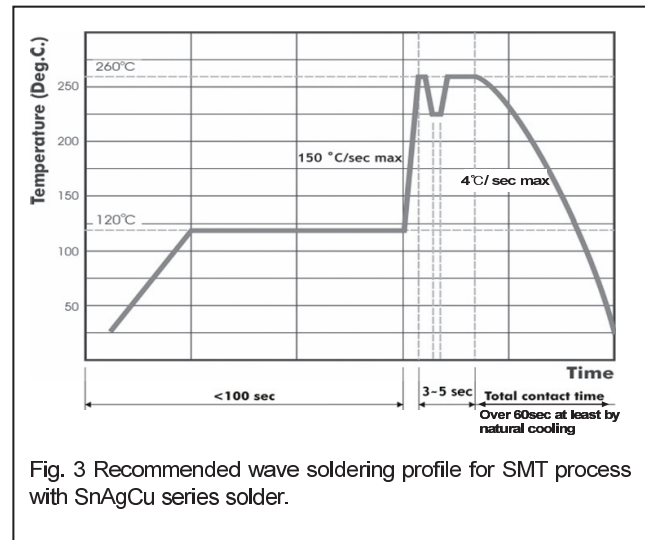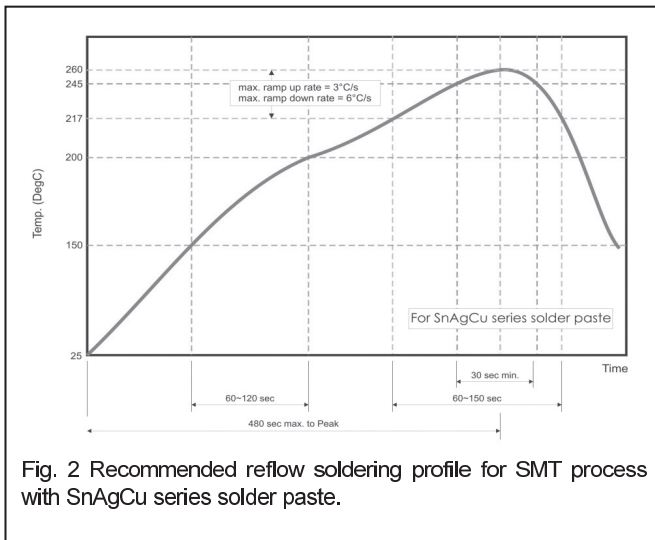

Taiwan - Yang-Mei Plant / Sales Office

Walsin Technology Corporation
566-1, Kao-Shi Road, Yang-Mei,
Tao-Yuan, Taiwan
Tel: +886-3-475-8711
Fax: +886-3-475-7130
Email: info@passivecomponent.com

Taiwan - Kaohsiung Plant

Walsin Technology Corporation
1st, West 13 Street, K.E.P.Z.
Kaohsiung, Taiwan
Tel: +886-7-821-8171
Fax: +886-7-813-1664
Email: info@passivecomponent.com

China - Dalang Plant / Sales Office

Dongguan Walsin Tech. Electronics CO., Ltd.
Xiniupo Administrative Zone,
Dalang Town, Dongguan City,
Guangdong Province 523799
Tel: +86-769-831-15168
Fax: +86-769-831-15188
Email: stlin@passivecomponent.com

China - Suzhou Plant / Sales Office

Suzhou Walsin Technology Electronics Co., Ltd.
No. 369, Changyan Street,
Suzhou Industrial Park,
Jiangsu Province 215126
Tel: +86-512-628-36888
Fax: +86-512-628-37888
Email: davidcheng@passivecomponent.com

China - Guangzhou Plant / Sales Office

Pan Overseas (Guangzhou) Electronic Co., Ltd.
No. 277, Hong Ming Road, Eastern Section,
Guangzhou Economic and Technology
Development Zone, China
Tel: +86-20-8223-7476
Fax: +86-20-8223-7475
Email: info@passivecomponent.com

China - Chongqing Sales Office

Avenue of Stars Yongchuan District No.999
Chongqing , China
Tel: +86-512-628-36888 Ext:5329
Fax: +86-512-628-37888
Email: tommylee@passivecomponent.com

Germany - Munich Sales Office

Walsin Technology Corporation Europe
Stefan-George-Ring 29, 81929 Munich,Germany
Tel: +49-(0)89-9308-6475
Fax: +49-(0)89-9308-6464
Email: aw@passivecomponent.com

Singapore - Sales Office

WTC Singapore Sales Office, Singapore
8 Ubi View #04-01 Serial System Building
Singapore 408554
Tel: +65-6896-3877
Fax: +65-6861-3381
Email: michaelchee@sg.passivecomponent.com

United States - West Coast Sales Office

Walsin Technology Corporation, USA
39500 Stevenson Place Suite 101,
Fremont, CA 94539, USA
Tel: +1-214-708-5182
E-mail: fctseng@passivecomponent.com

JAPAN - Sales Office

WTC Japan Sales Office, Japan
8-4-17, Fukayanaka, Ayase-shi,
Kanagawa, 252-1107, Japan.
Tel: +81-467-71-0884
Fax: +81-467-71-0910
Email: tsakano@kamaya.co.jp



Walsin Technology Corporation

TAIWAN - WTC Yang-Mei Plant / Sales Office

Walsin Technology Corporation

566-1, Kao-Shi Road, Yang-Mei, Tao-Yuan, Taiwan

Tel: +886-3-475-8711

Fax: +886-3-475-7130

Email: info@passivecomponent.com

Kaohsiung Plant, Taiwan

Walsin Technology Corporation

1st, West 13 Street, K.E.P.Z. Kaohsiung, Taiwan

Tel: +886-7-821-8171

Fax: +886-7-813-1661

Email: info@passivecomponent.com



July 2014